





# LED Filament

The LED filament lamps distinguish themselves by their sparkling white light, blending perfectly with crystal chandeliers and modern style fixtures.

The LED filament victorian style lamps, they have an amber coating which provides a warm light that resembles the ambiance created by incandescent lamps.

This line also includes a long life lamps series, which bring style to any decor while offering an exceptional long life of 25 000 hours.

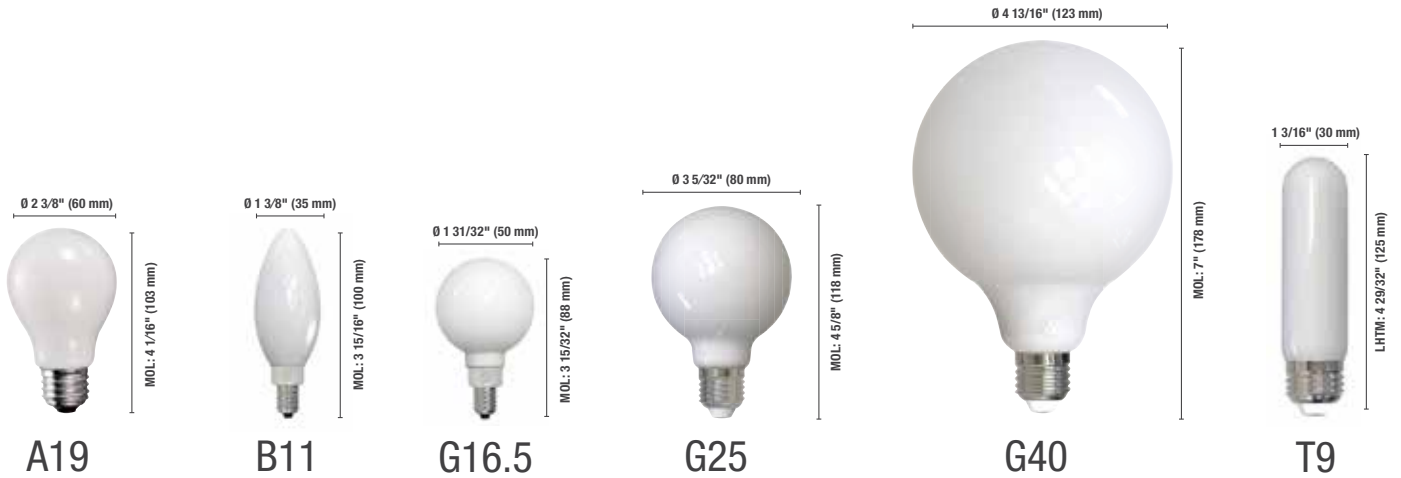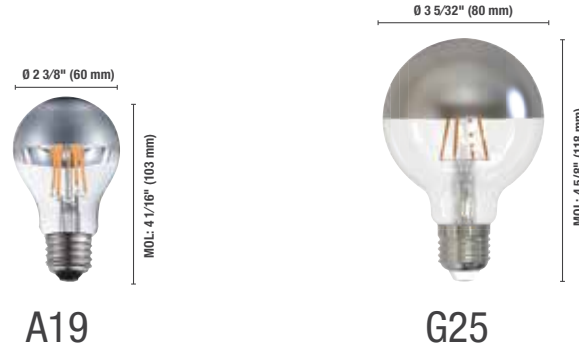

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
------------	-------------	---------------	-----------	------	-------------	-----------------	-----	----------------	-------------------	----------------------------	-------------------------

**Half Mirror**


<b>A19</b>											
65821 <sup>2</sup>	LED/A19/S2/4W/27K/HM/O/FIL/STD	Oblique	4	E26	120	2 700	80	15 000	360	40	10/50
<b>G25</b>											
67661 <sup>2</sup>	G25/S3/4.5W/27K/HM/O/FIL/STD	Vertical	4.5	E26	120	2 700	80	15 000	380	40	10/40

**Soft White**

<b>A19</b>											
67780 <sup>1 2</sup>	A19/S3/8.5W/27K/SW/FIL/STD	N/A	8.5	E26	120	2 700	80	15 000	800	60	10/40
67781	A19/S3/8.5W/30K/SW/FIL/STD	N/A	8.5	E26	120	3 000	80	15 000	800	60	10/40
<b>B11</b>											
67759 <sup>2</sup>	B11/S3/4W/27K/SW/E12/FIL/STD	N/A	4	E12	120	2 700	80	15 000	350	40	10/100
67760 <sup>2</sup>	B11/S3/4W/30K/SW/E12/FIL/STD	N/A	4	E12	120	3 000	80	15 000	350	40	10/100
<b>G16.5</b>											
67763 <sup>2</sup>	G16.5/S3/5W/27K/SW/E12/FIL/STD	N/A	5	E12	120	2 700	80	15 000	450	60	10/100
<b>G25</b>											
67662 <sup>1 2</sup>	G25/S3/4.5W/27K/SW/FIL/STD	N/A	4.5	E26	120	2 700	80	15 000	380	40	10/40
<b>G40</b>											
67667 <sup>1 2</sup>	G40/S3/8.5W/27K/SW/FIL/STD	N/A	8.5	E26	120	2 700	80	15 000	800	60	5/20
<b>T9</b>											
67783	T9/S3/5W/27K/SW/FIL/STD	N/A	5	E26	120	2 700	80	15 000	500	60	1/100

Lumen values are derived from photometric testing  
 For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)




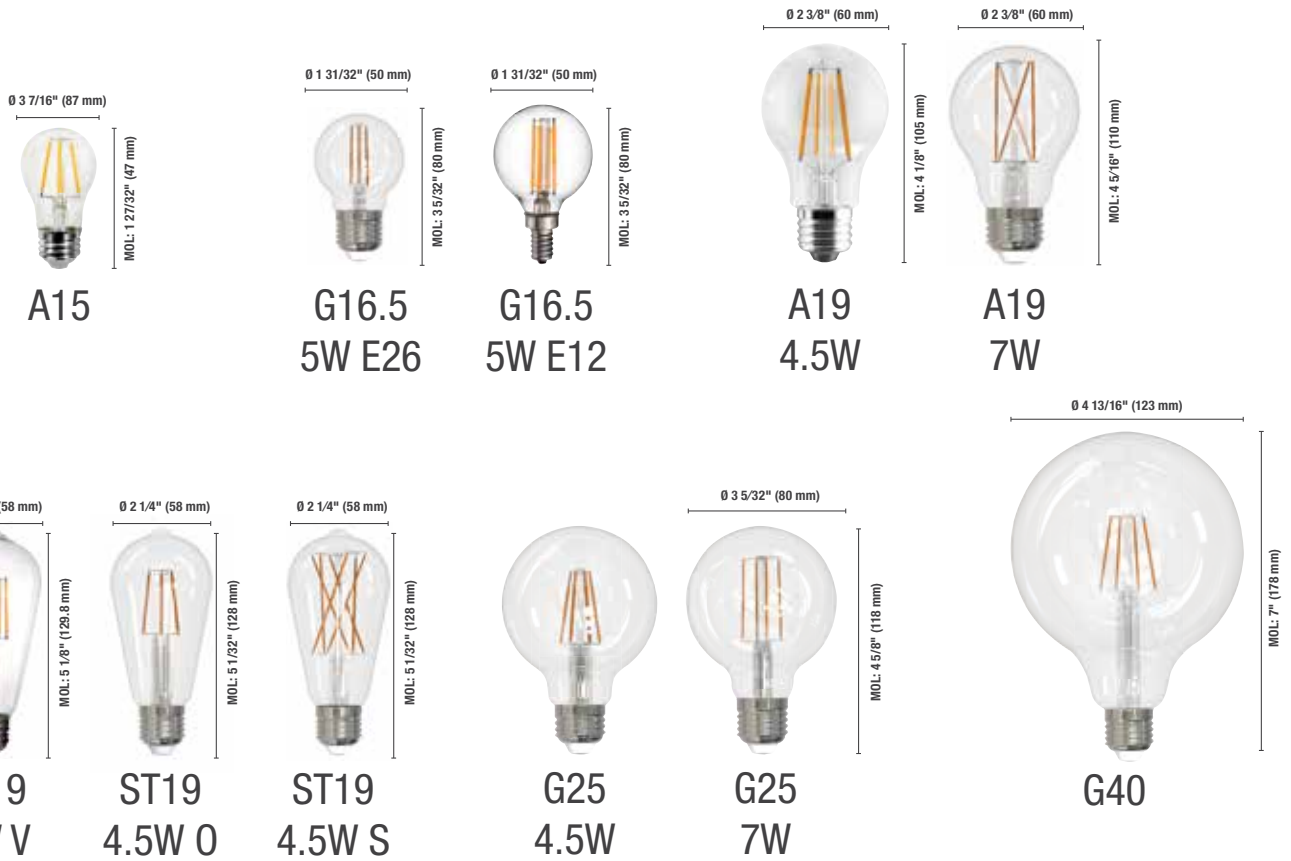

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>A15</b>												
67785	A15/S3/5W/27K/V/FIL/STD	Vertical	5	E26	120	2 700	80	Clear	15 000	450	40	10/100
<b>A19</b>												
67744	A19/S3/4.5W/27K/O/FIL/STD	Oblique	4.5	E26	120	2 700	80	Clear	15 000	45	40	10/40
67745	A19/S3/7W/27K/S/FIL/STD	Spiral	7	E26	120	2 700	80	Clear	15 000	800	60	1/40
67746	A19/S3/7W/30K/S/FIL/STD	Spiral	7	E26	120	3 000	80	Clear	15 000	800	60	1/40
<b>ST19</b>												
67750	ST19/S3/4.5W/27K/O/FIL/STD	Oblique	4.5	E26	120	2 700	80	Clear	15 000	450	40	1/40
67748	ST19/S3/4.5W/27K/S/FIL/STD	Spiral	4.5	E26	120	2 700	80	Clear	15 000	450	40	1/40
67749 <sup>1</sup>	ST19/S3/4.5W/30K/S/FIL/STD	Spiral	4.5	E26	120	3 000	80	Clear	15 000	450	40	1/40
67162 <sup>1</sup>	ST19/S2/7W/27K/V/FIL/STD	Vertical	7	E26	120	2 700	80	Clear	15 000	800	60	10/40
67163 <sup>1</sup>	ST19/S2/7W/30K/V/FIL/STD	Vertical	7	E26	120	3 000	80	Clear	15 000	800	60	10/40
<b>G16.5</b>												
67762	G16.5/S3/5W/27K/E12/V/FIL/STD	Vertical	5	E12	120	2700	80	Clear	15 000	500	60	10/100
67764	G16.5/S3/5W/27K/V/FIL/STD	Vertical	5	E26	120	2 700	80	Clear	15 000	500	60	10/100
<b>G25</b>												
67663 <sup>1</sup>	G25/S3/4.5W/27K/O/FIL/STD	Oblique	4.5	E26	120	2 700	80	Clear	15 000	450	40	10/40
67664 <sup>1</sup>	G25/S3/7W/27K/V/FIL/STD	Vertical	7	E26	120	2 700	80	Clear	15 000	800	60	10/40
<b>G40</b>												
67666 <sup>1</sup>	G40/S3/4.5W/27K/O/FIL/STD	Oblique	4.5	E26	120	2 700	80	Clear	15 000	450	40	5/20

Lumen values are derived from photometric testing  
 For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)




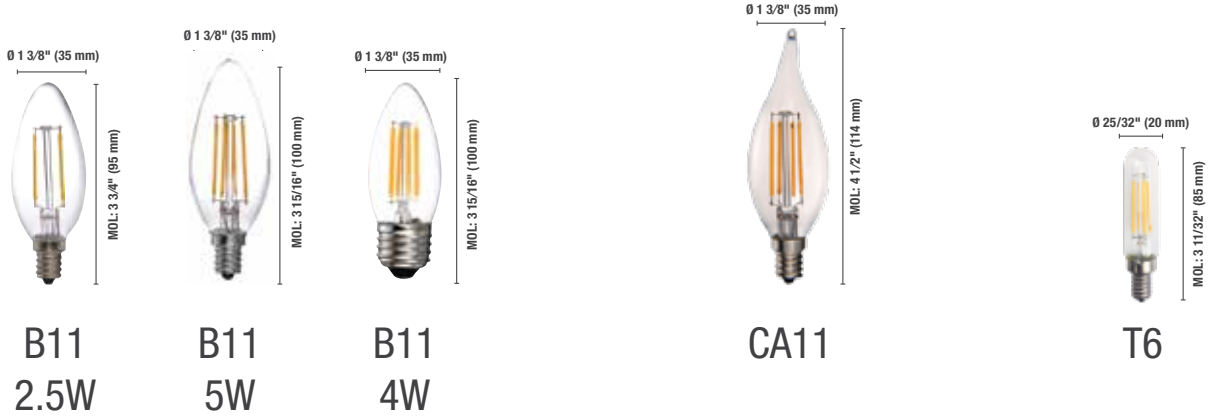

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>B11</b>												
67753	B11/S3/2.5W/27K/E12/V/FIL/STD	Vertical	2.5	E12	120	2 700	80	Clear	15 000	250	25	10/100
67752	B11/S3/4W/27K/V/FIL/STD	Vertical	4	E26	120	2 700	80	Clear	15 000	350	40	100
67754	B11/S3/5W/27K/E12/V/FIL/STD	Vertical	5	E12	120	2 700	80	Clear	15 000	500	60	100
67755	B11/S3/5W/30K/E12/V/FIL/STD	Vertical	5	E12	120	3 000	80	Clear	15 000	500	60	100
67756	B11/S3/5W/40K/E12/V/FIL/STD	Vertical	5	E12	120	4 000	80	Clear	15 000	500	60	10/100
67757	B11/S3/5W/50K/E12/V/FIL/STD	Vertical	5	E12	120	5 000	80	Clear	15 000	500	60	100
<b>CA11</b>												
65674	LED/CA11/S2/4.8W/27K/E12/V/FIL/STD	Vertical	4.8	E12	120	2 700	80	Clear	15 000	398	60	1/80
<b>T6</b>												
67765	T6/S3/4.5W/27K/E12/V/FIL/STD	Vertical	4.5	E12	120	2 700	80	Clear	15 000	450	40	10/100
67766	T6/S3/4.5W/30K/E12/V/FIL/STD	Vertical	4.5	E12	120	3 000	80	Clear	15 000	450	40	25/200
<b>T9</b>												
67782	T9/S3/5W/27K/O/FIL/STD	Oblique	5	E26	120	2 700	80	Clear	15 000	500	60	100
67784	T9/S3/5W/30K/O/FIL/STD	Oblique	5	E26	120	3 000	80	Clear	15 000	500	60	100
<b>T10</b>												
64520 <sup>2</sup>	LED/T10/6W/27K/LL/V/FIL/STD	Vertical	6	E26	120	2 700	95	Clear	25 000	600	60	50/100
64522 <sup>2</sup>	LED/T10/6W/27K/LL/Z/FIL/STD	Zig-Zag	6	E26	120	2 700	95	Clear	25 000	600	60	50/100

Lumen values are derived from photometric testing  
 For a complete list of compatible dimmers and ENERGY STAR qualified products,  
 please visit [www.standardpro.com](http://www.standardpro.com)



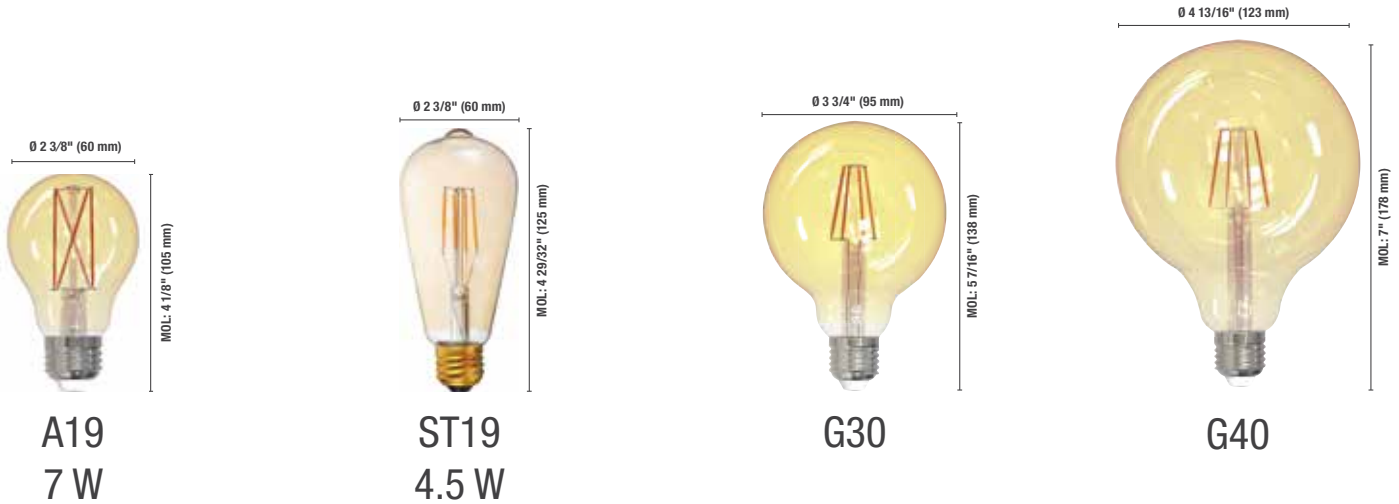

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>Victorian Style</b>												
<b>A19</b>												
67767	A19/S3/7W/22K/A/S/FIL/STD	Spiral	7	E26	120	2 200	80	Amber	15 000	650	40	10/40
<b>ST19</b>												
67768	ST19/S3/4.5W/22K/A/O/FIL/STD	Oblique	4.5	E26	120	2 200	80	Amber	15 000	380	40	40
<b>G30</b>												
67665	G30/S3/4.5W/22K/A/O/FIL/STD	Oblique	4.5	E26	120	2 200	80	Amber	15 000	380	40	10/40
<b>G40</b>												
67668	G40/S3/4.5W/22K/A/O/FIL/STD	Oblique	4.5	E26	120	2 200	80	Amber	15 000	380	40	5/20

Lumen values are derived from photometric testing  
 For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)






B11




CA11



T14  
Long Life

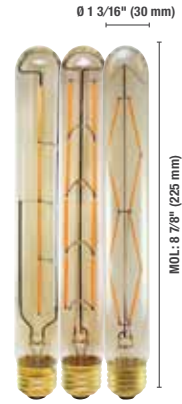

T10  
Long Life

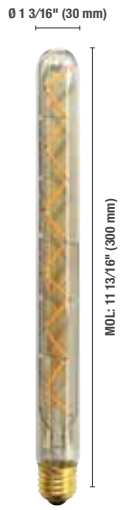

T10L  
Long Life

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>Victorian Style</b>												
<b>B11</b>												
67758	B11/S3/3.6W/22K/A/E12/V/FIL/STD	Vertical	3.6	E12	120	2 200	80	Amber	15 000	320	40	100
<b>CA11</b>												
67761	CA11/S3/4.5W/22K/A/E12/V/FIL/STD	Vertical	4.5	E12	120	2 200	80	Amber	15 000	350	40	10/100
<b>T14</b>												
64529 <sup>2</sup>	LED/T14/6W/22K/LL/A/S/FIL/STD	Spiral	6	E26	120	2 200	95	Amber	25 000	450	40	50/100
<b>T10</b>												
64521 <sup>2</sup>	LED/T10/6W/22K/LL/A/V/FIL/STD	Vertical	6	E26	120	2 200	95	Amber	25 000	450	40	50/100
64523 <sup>2</sup>	LED/T10/6W/22K/LL/A/Z/FIL/STD	Zig-Zag	6	E26	120	2 200	95	Amber	25 000	450	40	50/100
<b>T10L</b>												
64525 <sup>2</sup>	LED/T10L/6W/22K/LL/A/Z/FIL/STD	Zig-Zag	6	E26	120	2 200	95	Amber	25 000	450	40	50/100

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)

6 damp location    dimmable    2 yrs warranty    3 yrs warranty    cULus    ENERGY STAR




Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Case qty (inner/master)
<b>Soft Filament</b>											
<b>A19</b>											
67315	A19/4.5W/27K/QL/FIL/STD	Quad Loop	4.5	E26	120	2 700	90	Clear	15 000	250	50/100
<b>ST19</b>											
67317	ST19/5W/27K/DH/FIL/STD	Double Helix	5	E26	120	2 700	90	Clear	15 000	300	50/100
67318	ST19/5W/27K/CH/DH/FIL/STD	Double Helix	5	E26	120	2 700	90	Chrome	15 000	125	50/100
67319	ST19/5W/27K/A/DH/FIL/STD	Double Helix	5	E26	120	2 700	90	Amber	15 000	250	50/100

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)

6 damp location    dimmable    enclosed fixture    3 yrs warranty    cULus



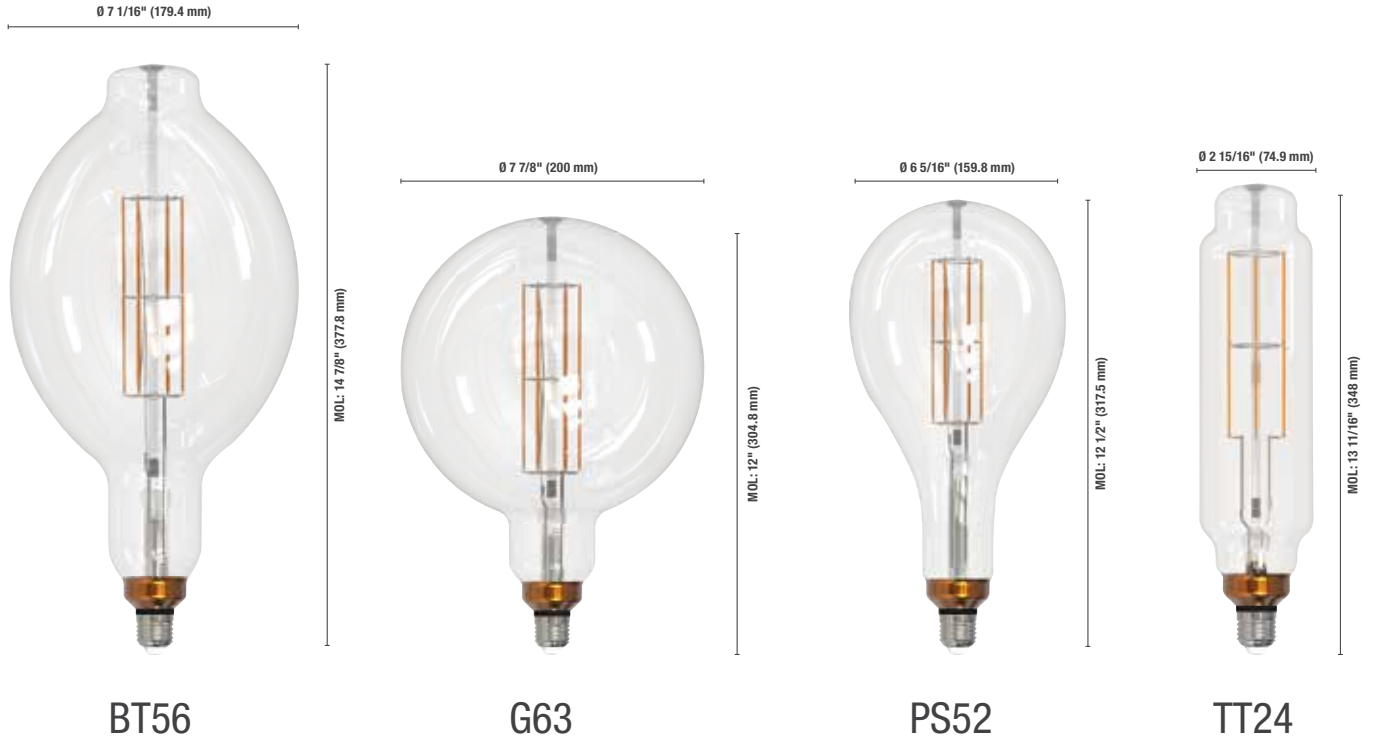

BT56

G63

PS52

TT24

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (master)
<b>Large Filament</b>											
<b>BT56</b>											
67321	BT56/8W/27K/V/FIL/STD	Vertical	8	E26	120	2 700	80	15 000	900	60	4
<b>G63</b>											
67320	G63/8W/27K/V/FIL/STD	Vertical	8	E26	120	2 700	80	15 000	900	60	4
<b>PS52</b>											
67322	PS52/8W/27K/V/FIL/STD	Vertical	8	E26	120	2 700	80	15 000	900	60	4
<b>TT24</b>											
67323	TT24/8W/27K/V/FIL/STD	Vertical	8	E26	120	2 700	80	15 000	900	60	4

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)

