

LSVS

LED TRI-PROOF

Corrosion, dust and vandal proof

The LSVS Tri-Proof series is highly resistant to heavy impacts (IK10), water jets (IP66), dust, and temperature variations. This luminaire balances high performance lighting while providing minimum glare. Ideal for use in commercial or industrial lighting.

FEATURES AND SPECIFICATIONS

• Applications

- Gas station
- Parking
- Train station
- Airport
- Tunnel

• Construction

Housing

- Aluminum housing
- Vandal proof frosted Polycarbonate lens which balances high performance lighting while providing minimum glare
- 6' interlinkable water proof cable and connectors at each end standard

Mounting

Surface clips and row mounting extension standard. To see how many units can be link together, see table below.

Aviation cable available as an accessory.

• Electrical

- Beam angle standard 120°
- Available in 4'

Ambient temperature

-20° to +40°

Input voltage	Length (ft)	Mount row Max Qty
120 V AC / 40 W	4	8
277 V AC / 40 W	4	16
347 V AC / 40 W	4	20

• Compliances

- Suitable for damp and wet locations
- IP66
- IK10
- Meets requirements of ICES-005
- Class II
- cULus



OVERVIEW

Light source	LED
Watts (W)	40
Lumen output (lm)	4 909
Efficacy (lm/W)	120
Color temperature (K)	4 000
CRI	80+
Weight (lbs)	5.34

10
yrs
PR warranty



QUICK SHIP AND TECHNICAL SPECIFICATION TABLE 🕒¹

Order code	Part number	Watts (W)	Volts (V AC)	Color temp. (K) ²	Lumen output (lm) ³	Efficacy (lm/W)	CRI	Life L70 (hrs) ⁴	Tested hours LM-80 (hrs) ⁴	Power factor	THD (%)
64924	LSVS/40W/4FT/40K/3/ND/FP/L/STD	40	347	4 000	4 909	120	80 +	91 000	10 000	0.93	15

¹ **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

² Typical color temperature range: +/- 5 %.


³ Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

⁴ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

INCLUDED PARTS


MOUNTING CLIPS

One set of 2 for each fixture



6' CABLE


with one set of connectors at each end



ACCESSORIES (order separately)

Part number	Description	Type
64175	LSVS/ACC/AIRCAB/STD	Aviation cable kit

DIMENSIONS

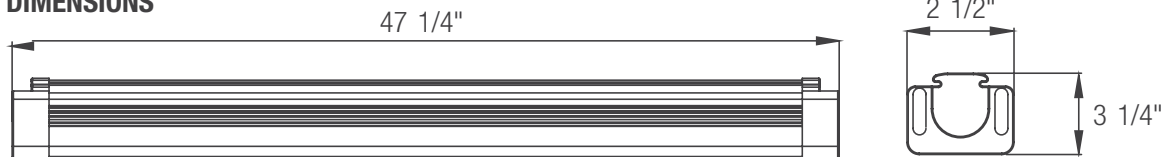

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.