

## Series Spec Sheet

# WTL

## LED ADJUSTABLE WALL PACK

### 3 CCT and 2 Power Selectable

### Integrated photocell

The WTL adjustable wall pack series is built with a modern design which includes a 0° to 90° field adjustable angle dial allowing for a flexible installation to suit any outdoor perimeter, building entrances or walkways application. This luminaire has an integrated photocell and features the latest in LED technology such as allowing the user to control the color temperature and power by using the internal field adjustable integrated switches.

### FEATURES AND SPECIFICATIONS

#### • Construction

##### Housing

- This luminaire is made out of aluminum die cast and comes in a bronze powder coat finish
- The housing has 4 conduit entries of 1/2" on each side
- Each model has an integrated button type photocell that can be easily turned off
- 0° to 90° field adjustable angle dial

##### Lens

Each luminaire is outfitted with a clear polycarbonate lens

#### • Electrical

- Color temperature 3 000/4 000/5 000 K, default setting 4 000 K
- Multi Volt: 120-347 V
- Ambient temperature: -40 °C to 50 °C
- Estimated lifespan of 50 000 hours to L70
- 0-10 V dimming
- 6 kV surge protection

#### • Compliances

- Wet location
- IP65
- IK07
- Meets requirements of ICES-005 issue 5 for class B products
- cULus



### OVERVIEW

Light source	LED
Watts (W)	15/30 50/80
Lumen output (lm)	1 950 - 10 429
Efficiency (lm/W)	121 - 140
Color temperature (K)	3 000/4 000/5 000
CRI	70+
Weight (lbs)	2.99 - 4.85



ICES  
005



IK07



**QUICK SHIP AND TECHNICAL SPECIFICATION TABLE** 🕒<sup>1</sup>

Order code	Model number	DLC Unique ID	Watts (W)	Volts (V)	Color temp. (K) <sup>2</sup>	Lumen output (lm) <sup>3,4</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>5</sup>	Beam angle (°)	Finish	Dimming (Yes/No)	Power factor	THD (%)	Traditional equivalent (W)		Case qty (master)
															MH	HPS	
<b>CCT and Power Selectable with Integrated Photocell<sup>6</sup></b>																	
68768	WTL-PS30A-Q-3C-BR-P	P77YNXT4	15/30	120-347	3 000/4 000/5 000	2 100-3 925	137-140	70+	50 000	90 x 110	Bronze	Yes	≥0.90	≤20	70 - 150	70 - 100	8
68769	WTL-PS80A-Q-3C-BR-P	PG0JW5R3	50/80	120-347	3 000/4 000/5 000	7 000-10 392	139-140	70+	50 000	90 x 110	Bronze	Yes	≥0.90	≤20	175 - 400	150 - 250	4

<sup>1</sup> **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.  
<sup>2</sup> Typical color temperature range: +/- 5 %.  
<sup>3</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.  
<sup>4</sup> Lumen values are based on 4 000 K default settings. Please refer to Quick Ship Technical Specification Table for more details on other color temperatures.  
<sup>5</sup> Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.  
<sup>6</sup> Integrated ON/OFF photocell that can be easily disabled.

**ORDERING GUIDE**


WTL	—	Q	—	3C	—	P	/
Series	Lumen package (W)	Volts (V)	Color temp. (K)	Casting color	Mandatory options	Options	
WTL	PS30A - 15/30 PS80A - 50/80	Q - 120-347	3C - 3 000/4 000/5 000	BR - Bronze SP - Special color	P - Button type photocell	KV - 10 kV OSI - Occupancy sensor	

**QUICK SHIP TECHNICAL SPECIFICATION TABLE**

Order code	Model number	Watts (W)	3 000 K			4 000 K			5 000 K		
			Lumen output (lm)	Efficiency (lm/W)	LED Current (mA)	Lumen output (lm)	Efficiency (lm/W)	LED Current (mA)	Lumen output (lm)	Efficiency (lm/W)	LED Current (mA)
68768	WTL-PS30A-Q-3C-BR-P	15	1 950	130	0.14	2 100	140	0.14	2 025	135	0.14
		30	3 616	121	0.28	3 925	137	0.28	3 919	131	0.28
68769	WTL-PS80A-Q-3C-BR-P	50	6 500	130	0.46	7 000	140	0.46	6 750	135	0.46
		80	9 625	129	0.75	10 392	139	0.75	10 429	134	0.75

Default programming:  
 68768: 30 W / 4 000 K  
 68769: 80 W / 4 000 K

**ADJUSTABLE ANGLE DIAL**

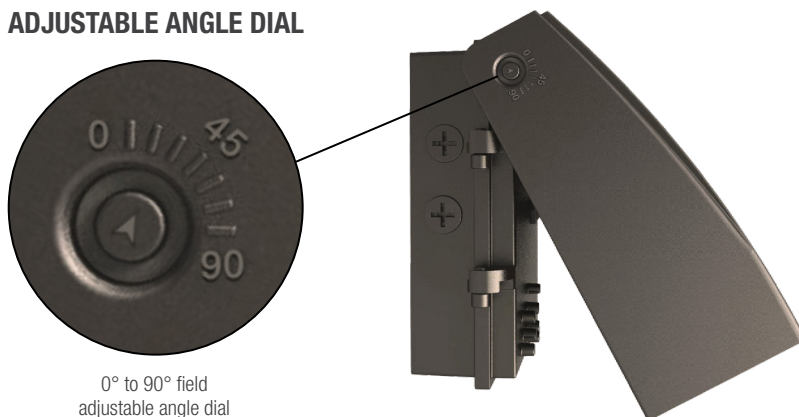


0° to 90° field adjustable angle dial


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**DIMENSIONS**

68768

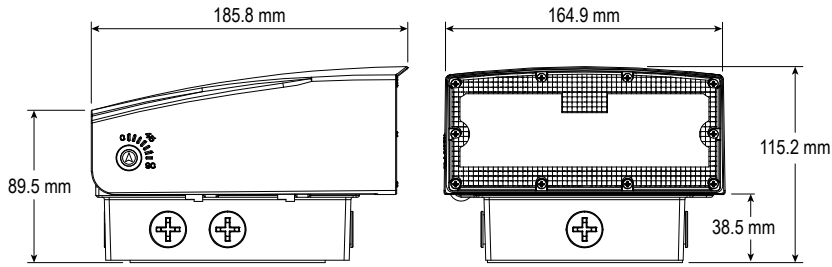


68769

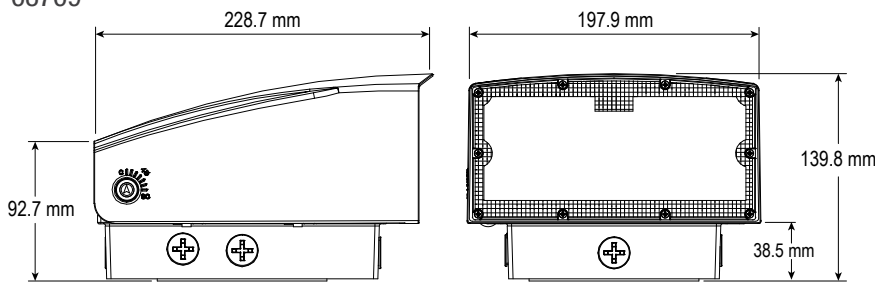

**PHOTOMETRIC DATA<sup>1</sup>**

68768 • WTL-PS30A-Q-3C-P • 15 W • 4 000 K • 2 099 lm

**Polar candela distribution**

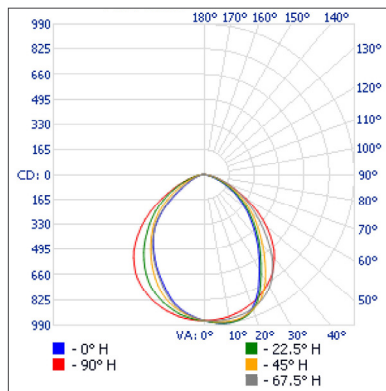

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	729.5	34.8%
0-40	1 152.1	54.9%
0-60	1 835.1	87.4%
60-90	258.1	12.3%
70-100	87.4	4.2%
90-120	1.2	0.1%
0-90	2 093.3	99.7%
90-180	5.7	0.3%
0-180	2 099.0	100%

**Illuminance at a distance**

	Center beam fc	Beam width
8.3'	13.9	14.9' 20'
16.7'	3.44	29.9' 40.3'
25'	1.54	44.8' 60.4'
33.3'	0.87	59.6' 80.4'
41.7'	0.55	74.7' 100.7'
50'	0.38	89.5' 120.8'

■ Vert. spread: 83.7°  
■ Horiz. spread: 100.7°


<sup>1</sup> Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**PHOTOMETRIC DATA<sup>1</sup>**

68768 • WTL-PS30A-Q-3C-P • 30 W • 4 000 K • 3 923 lm


**Polar candela distribution**

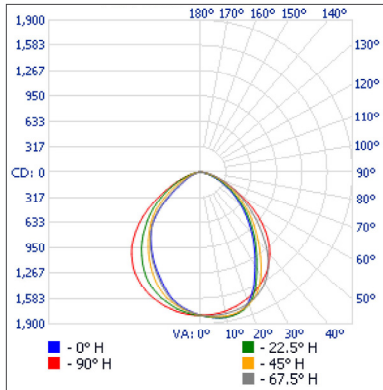

**Zonal lumen summary**


Zone	Lumens	% Fixture
0-30	1 363.4	34.8%
0-40	2 153.3	54.9%
0-60	3 430.0	87.4%
60-90	482.4	12.3%
70-100	163.3	4.2%
90-120	2.3	0.1%
0-90	3 912.4	99.7%
90-180	10.7	0.3%
0-180	3 923.1	100%

**Illuminance at a distance**

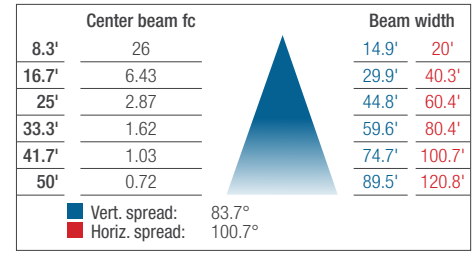

68769 • WTL-PS80A-Q-3C-P • 50 W • 4 000 K • 6 997 lm


**Polar candela distribution**

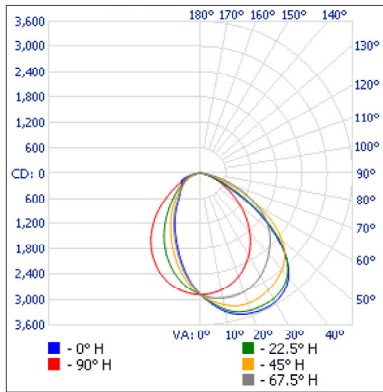

**Zonal lumen summary**


Zone	Lumens	% Fixture
0-30	2 181.9	31.2%
0-40	3 524.6	50.4%
0-60	5 938.3	84.9%
60-90	1 024.1	14.6%
70-100	365.4	5.2%
90-120	14.5	0.2%
0-90	6 962.4	99.5%
90-180	35.1	0.5%
0-180	6 997.4	100%

**Illuminance at a distance**

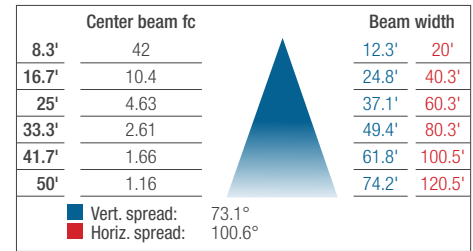

68769 • WTL-PS80A-Q-3C-P • 80 W • 4 000 K • 10 388 lm


**Polar candela distribution**

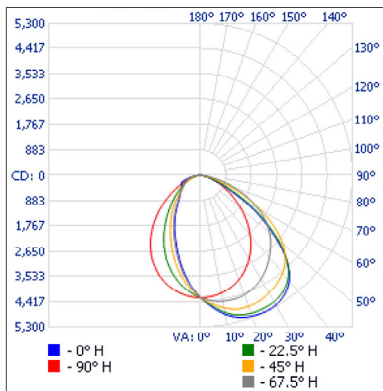

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	3 239.1	31.2%
0-40	5 232.5	50.4%
0-60	8 815.8	84.9%
60-90	1 520.3	14.6%
70-100	542.4	5.2%
90-120	21.5	0.2%
0-90	10 336.1	99.5%
90-180	52.0	0.5%
0-180	10 388.2	100%

**Illuminance at a distance**

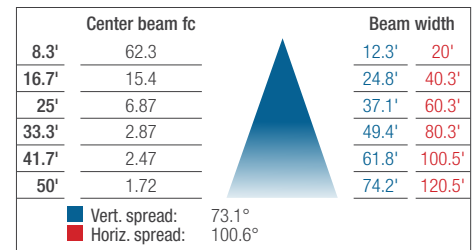

<sup>1</sup> Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.