

# PROTECT YOUR EMPLOYEES AND CUSTOMERS FROM COVID-19.

## ENHANCE SAFETY WITH THE RIGHT PRODUCTS.

### PANELS



TRANSFORM OUR LED PANEL INTO A COVID SIGNAGE SOLUTION BY ADDING A BRANDED GRAPHIC FILM.

- Customize your text, add your logo
- Available in 1X4, 2X2 and 2X4
- Surface kit and 4.5' suspension kit sold separately



#### SUSPENDED MOUNTING (ADJUSTABLE HEIGHT)

#### SURFACE MOUNTING

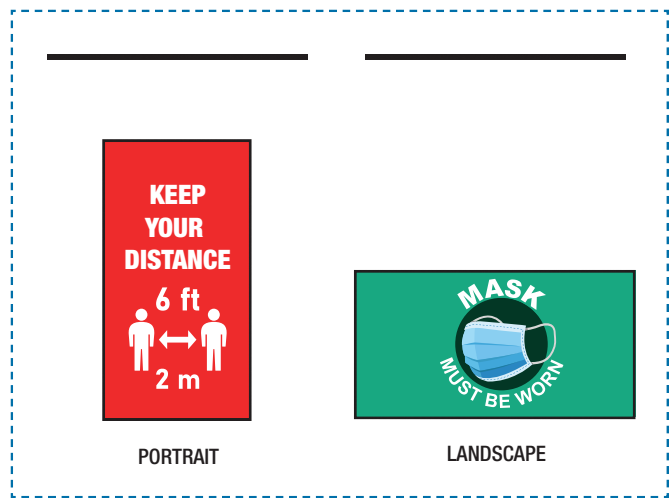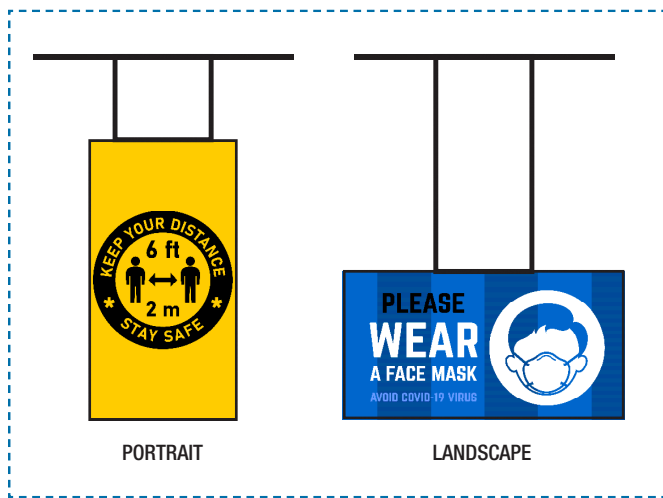

Contact factory for more information




www.standardpro.com



## SOCIAL DISTANCING SIGNS

- Available in the RMS (steel) and RMXL (extruded aluminum)
- 2M/6FT, 1M/3FT, and MANDATORY MASK available
- Optional 8ft line cord

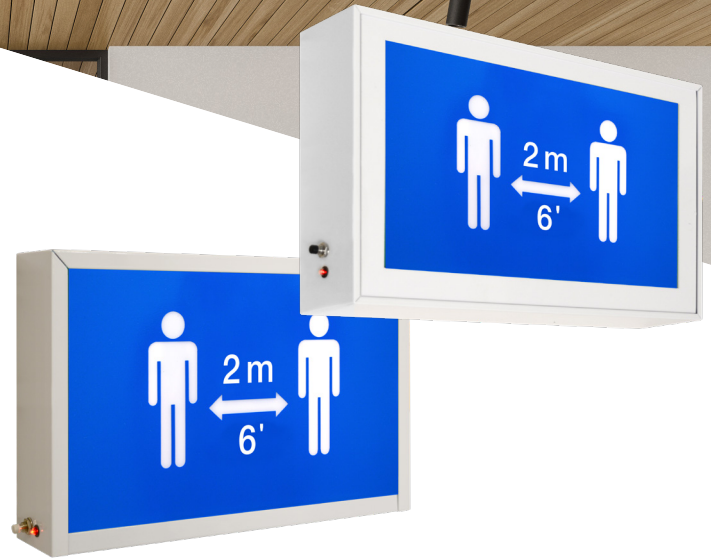

## UVC LAMPS

- Germicidal fluorescent lamps that produce ultraviolet light
- Have the ability to eradicate harmful airborne bacteria, mold spores and viruses
- Available in T5 & T8 shapes



Order code	Description	Shape	Base	Watts (W)	Average life (hours)	Lamp current (A)	Length	Diameter	UV Output @ 1m (µW/cm²)	Case qty
							in. (mm)	in. (mm)		
10806	G30T8/PH/G13 EYE	T8	G13	30	8 000	0.36	35 <sup>5</sup> / <sub>32</sub> (893)	1 (26)	117	100
10807	G15T8/PH/G13 EYE	T8	G13	15	8 000	0.30	17 <sup>5</sup> / <sub>32</sub> (436)	1 (26)	49	100
10809	G6T5/PH/G5 EYE	T5	G5	6	6 000	0.15	8 <sup>9</sup> / <sub>32</sub> (210)	<sup>5</sup> / <sub>8</sub> (16)	16.7	100
10810	G4T5/PH/G5 EYE	T5	G5	4	6 000	0.16	5 <sup>9</sup> / <sub>32</sub> (134)	<sup>5</sup> / <sub>8</sub> (16)	8.30	100
15842	G36T5/L/IS/FA8	T5	Fa8	41	10 000	0.43	33 <sup>3</sup> / <sub>16</sub> (843)	<sup>5</sup> / <sub>8</sub> (16)	130	30

## COMPATIBLE BALLASTS

For Lamp 10806:				
Order Code:	57031	61065	57941	61066
Description:	E232T8PS120-277/H/XTRM	E432T8PS120-277/L/AS/BULK	E232T8PS347/H/XTRM	E432T8PS120-277/L/AS/BULK
No. of Lamps:	2 Lamps	4 Lamps	2 Lamps	4 Lamps
Line Voltage (V):	120-277	120-277	347	120-277
Operation Type:	Program Start (PS)	Program Start (PS)	Program Start (PS)	Program Start (PS)

For Lamps 10807, 10809 & 10810:		
Order Code:	59591	10457
Description:	E1528-120-SL GLB	E1528-347-SL GLB
No. of Lamps:	1 Lamp	1 Lamp
Line Voltage (V):	120	347
Operation Type:	Instant Start (IS)	Instant Start (IS)

Contact factory for more information



www.standardpro.com