





DECORATIVE AND ACCENT QUICK SHIP



STANPRO



Printed in Canada.

© 2021 STANDARD Products Inc. All Rights Reserved.

Data is based upon tests performed in a controlled environment.
Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.

For the latest version, please refer to our website.

www.standardpro.com



STANPRO

CONTENTS

DECORATIVE PENDANT

LED WALL SCONCE

TRADITIONAL / LINEAR

LED LINEAR ARCHITECTURAL

Kolika / Edge

LED ACCENT & UNDERCABINET LIGHTING

Armonia™ Slim Line Bar / LED Swivel / Fluo LED / Line Voltage Puck Light /
Low Voltage Puck Light / DUOLED

LED TAPE AND EXTRUSION

Low Voltage LED Tape / Extrusion and Lens / LED Driver / LED Tape Kit / 120 V LED Tape



Decorative Pendant

Stanpro now offers a complete line of Decorative Pendants, available in a selection of seven finishes and two different lampholder styles. Reflectors, glass shades and cages are also available to create a customizable look. Offered with a 10 feet cord, these pendants are suitable for both commercial and residential applications. Whether your decor is traditional, industrial, modern or rustic, you'll find a solution that will suit your style.

Consult Stanpro's LED lamps catalogue to choose among a wide variety of LED filament lamps which will add the final touch to your luminaire.




Series 100
Modern Style



Series 110
Industrial Style

Order code	Description	Volts (VAC)	Maximum Watts per socket (W)	Socket	Canopy and socket finish	Cord Color	Cord Length (ft)	Wire Gauge	Case qty (master)
Series 100 - Modern Style									
67266	PND/100/HW/BN-BK-BN/STD	120	60	E26	Brushed Nickel	Black	10	18 AWG/2C	27
67267	PND/100/HW/CH-SLV-CH/STD	120	60	E26	Chrome	Silver	10	18 AWG/2C	27
67270	PND/100/HW/ANT.GLD-BK-ANT.GLD/STD	120	60	E26	Antique Gold	Black	10	18 AWG/2C	27
67271	PND/100/HW/BK.CH-BK-BK.CH/STD	120	60	E26	Black Chrome	Black	10	18 AWG/2C	27
67265	PND/100/HW/WH-WH-WH/STD	120	60	E26	White	White	10	18 AWG/2C	27
Series 110 - Industrial Style									
67272	PND/110/HW/BN-BK-BN/STD	120	60	E26	Brushed Nickel	Black	10	18 AWG/2C	27
67273	PND/110/HW/CH-SLV-CH/STD	120	60	E26	Chrome	Silver	10	18 AWG/2C	27
67276	PND/110/HW/ANT.GLD-BK-ANT.GLD/ STD	120	60	E26	Antique Gold	Black	10	18 AWG/2C	27
67277	PND/110/HW/BK.CH-BK-BK.CH/ STD	120	60	E26	Black Chrome	Black	10	18 AWG/2C	27
67275	PND/110/HW/BZ-BK-BZ/STD	120	60	E26	Oil Rubbed Bronze	Black	10	18 AWG/2C	27

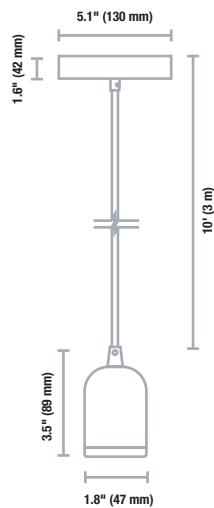

Series 100



Series 110



Series 200



Series 210



Series 300



Series 310



Series 320



Decorative Ring



Series 330 (10" & 14")



Series 340 (10" & 14")




Series 400 (10" & 14")


Accessory	Order code	Description	Finish	Diameter (in)	Case qty (master)
Metal cages	Series 200 - Industrial Style Cages				
	67278	PND/LHC/200/BK/STD	Black	5.5	27
	Series 210 - Industrial Style Cages				
	67279	PND/LHC/210/BK/STD	Black	5.3	27
Glass shades¹	Series 300				
	67280	PND/LS/300/GLS/7.5IN/CLR/STD	Clear	7.4	8
	Series 310				
	67281	PND/LS/310/GLS/7IN/CLR/STD	Clear	7	8
	Series 320				
	67282	PND/LS/320/GLS/5.5IN/CLR/STD	Clear	5.5	18
Decorative rings²	67293	PND/RING/WH/STD	White	-	40
	67294	PND/RING/BN/STD	Brushed Nickel	-	40
	67295	PND/RING/CH/STD	Chrome	-	40
	67297	PND/RING/ANT.GLD/STD	Antique Gold	-	40
	67298	PND/RING/BK.CH/STD	Black Chrome	-	40
	67299	PND/RING/BZ/STD	Oil Rubbed Bronze	-	40
Metal reflectors	Series 330 - Modern Style				
	67283	PND/LS/330/STL/10IN/BK/STD	Black	10	12
	67284	PND/LS/330/STL/10IN/WH/STD	White	10	12
	67285	PND/LS/330/STL/14IN/BK/STD	Black	14	6
	67286	PND/LS/330/STL/14IN/WH/STD	White	14	6
	Series 340 - Industrial Style				
	67287	PND/LS/340/STL/10IN/BK/STD	Black	10	16
	67288	PND/LS/340/STL/10IN/WH/STD	White	10	16
	67289	PND/LS/340/STL/14IN/BK/STD	Black	14	8
	67290	PND/LS/340/STL/14IN/WH/STD	White	14	8
	Series 400 - Industrial Style Half-Cages				
	67291	PND/LSC/400/10IN/BK/STD	Black	10	16
	67292	PND/LSC/400/14IN/BK/STD	Black	14	8

¹ A black decorative ring is included with each glass shade. Other finishes available. Order separately.
² Decorative rings only compatible with Series 300, 310 & 320.







Industrial Cage Series
200




Industrial Cage Series
210




Glass Shade Series
300




Glass Shade Series
310




Glass Shade Series
320

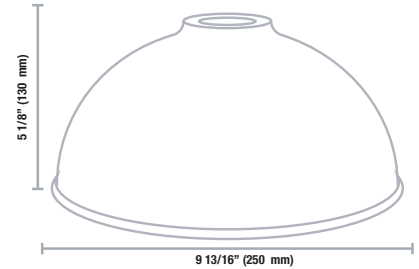


Reflector 10"
Series 330

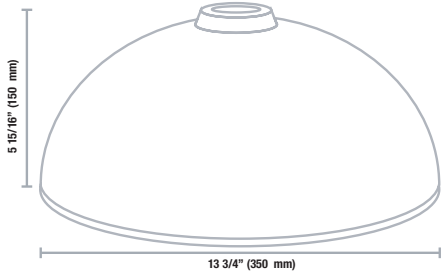


Reflector 14"
Series 330

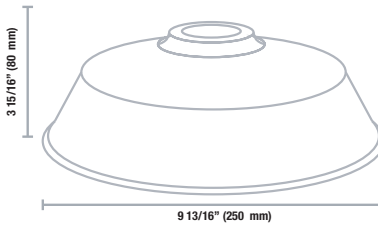


Reflector 10"
Series 340

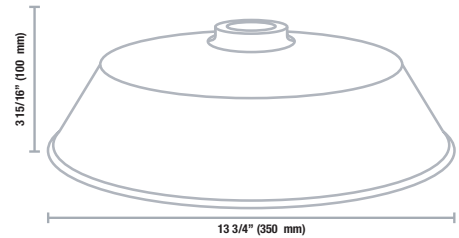


Reflector 14"
Series 340

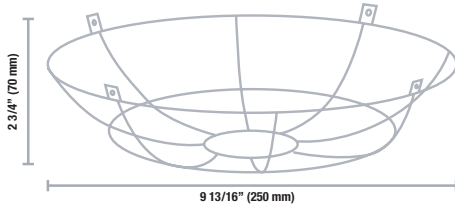

Half-Cage 11"
Series 400

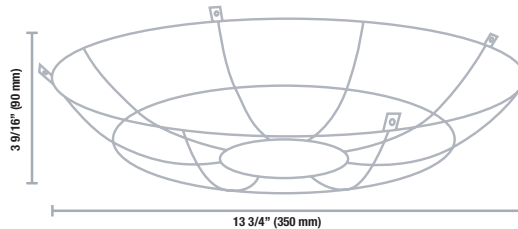

Half-Cage 14"
Series 400



Decorative Ring



LED Wall Sconce - Traditional

Stanpro offers two different styles of LED Wall Sconces, one of traditional design and the other more modern with a linear profile. These two models can easily fit into any decor, whether as a vanity fixture in a bathroom or as accent lighting in an hotel corridor.


Offered with a frosted lens, these wall luminaires provide a high quality diffuse light due to their high CRI of more than 90.




Order code	Description	ES (Yes/No)	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Housing Finish	Lens Finish	Beam angle (°)	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
Single																
65838	SVAN/SINGLE/10W/30K/BN/F/STD	Yes	10	120	3 000	628	63	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
65839	SVAN/SINGLE/10W/40K/BN/F/STD	Yes	10	120	4 000	669	67	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
Double																
65840	SVAN/DOUBLE/20W/30K/BN/F/STD	Yes	20	120	3 000	1 266	63	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
65841	SVAN/DOUBLE/20W/40K/BN/F/STD	Yes	20	120	4 000	1 344	67	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
Triple																
65842	SVAN/TRIPLE/30W/30K/BN/F/STD	Yes	30	120	3 000	1 917	64	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6
65843	SVAN/TRIPLE/30W/40K/BN/F/STD	Yes	30	120	4 000	2 023	67	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6
Quadruple																
65844	SVAN/QUAD/40W/30K/BN/F/STD	Yes	40	120	3 000	2 579	64	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6
65845	SVAN/QUAD/40W/40K/BN/F/STD	Yes	40	120	4 000	2 422	61	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6

ACCESSORY


Order code	Description	Type	Finish / color	Compatible with	Case qty (inner/master)
65959	SVAN/LENS/F/STD	Lens for modular vanity and wall sconce	Frosted	65838, 65839, 65840, 65841, 65842, 65843, 65844, 65845	10/200




Single



Double

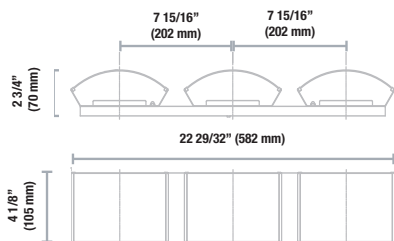

Triple

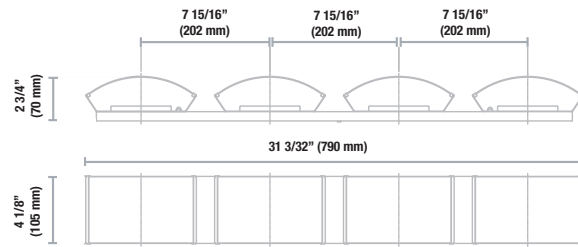

Quadruple


Lumen values are derived from photometric testing. For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit www.standardpro.com






LED Wall Sconce - Linear

Our series of linear LED Wall Sconces, equipped with frosted lenses, provide high quality lighting with a CRI 90+ while adding a decorative touch to the application. Adding an LED Wall Sconce adds a decorative element to match the look of a room; its modern design and smooth lighting can be integrated in a wide variety of decors. These linear LED wall sconces emit a soft white light and are offered in 3 different finishes. They are the perfect solution to everyday needs.

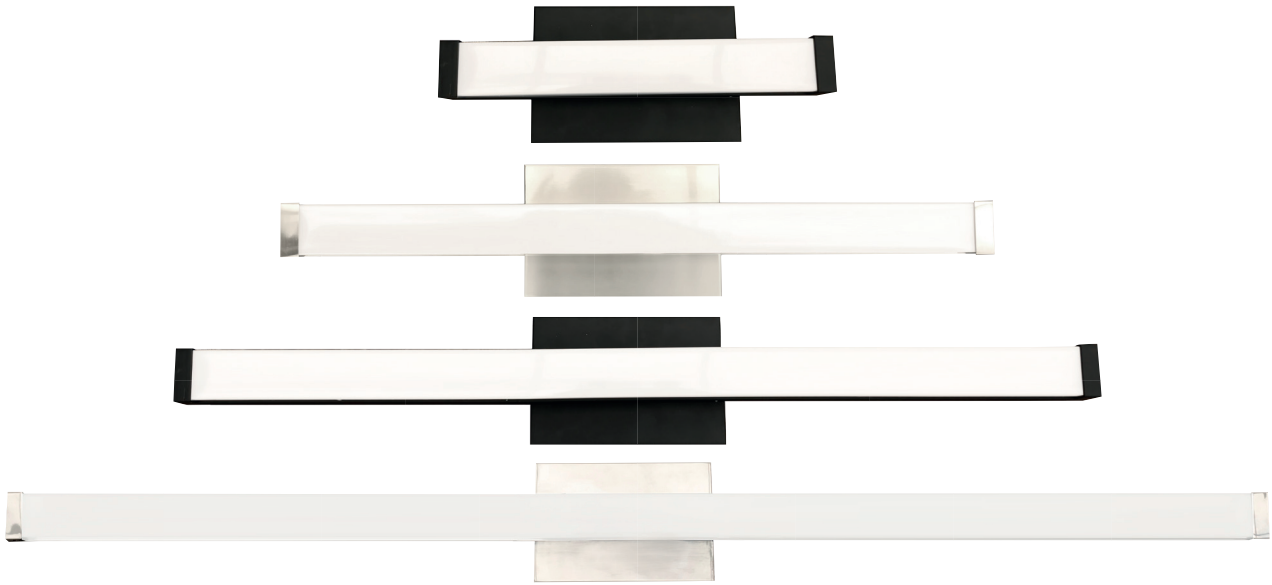

Order code	Description	ES (Yes/No)	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Finish	Lens Finish	Beam angle (°)	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
12"																
67342	SVAN/5W/12IN/30K/CH/F/STD	No	5	120	3 000	443	89	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10
67343	SVAN/5W/12IN/30K/BN/F/STD	No	5	120	3 000	439	88	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
67344	SVAN/5W/12IN/30K/BK/F/STD	No	5	120	3 000	421	84	90	50 000	Black	Frosted	120	Yes	>0.9	<15	10
67345	SVAN/5W/12IN/40K/BN/F/STD	No	5	120	4 000	449	90	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
24"																
67346	SVAN/10W/24IN/30K/CH/F/STD	No	10	120	3 000	879	88	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10
67347	SVAN/10W/24IN/30K/BN/F/STD	No	10	120	3 000	889	89	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
67348	SVAN/10W/24IN/30K/BK/F/STD	No	10	120	3 000	845	85	90	50 000	Black	Frosted	120	Yes	>0.9	<15	10
36"																
67349	SVAN/15W/36IN/30K/CH/F/STD	No	15	120	3 000	1 221	81	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10
67350	SVAN/15W/36IN/30K/BN/F/STD	No	15	120	3 000	1 219	81	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
67351	SVAN/15W/36IN/30K/BK/F/STD	No	15	120	3 000	1 160	77	90	50 000	Black	Frosted	120	Yes	>0.9	<15	10
48"																
67352	SVAN/20W/48IN/30K/CH/F/STD	No	20	120	3 000	1 470	74	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10

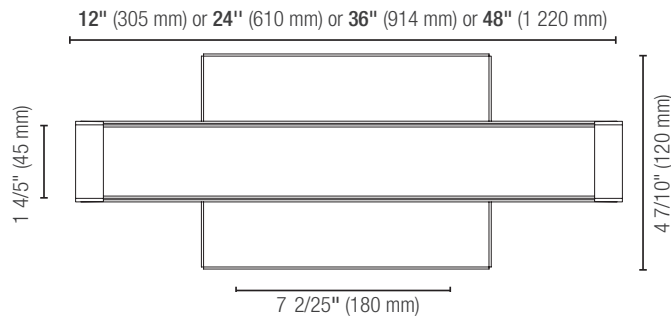

Lumen values are derived from photometric testing
 For a complete list of compatible dimmers, please visit www.standardpro.com







LED Architectural Luminaires



KOLIKA GEN2

The KOLIKA luminaires offer a sleek and lightweight design, making it the perfect choice for creating a modern atmosphere in any office, commercial or retail space. These 4' and 8' luminaires are available in a black or white matte finish and features the versatility to change the color temperature using a simple switch located inside the luminaire.

The KOLIKA GEN2 series also includes a stylish up and down light option, which provides a lovely indirect diffused light with more light directed downward to light up the desired space efficiently.




Order code	Model number	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Finish	Power factor	THD (%)	Case qty (master)
4'												
Direct												
68577	L1KCL-G2-4LS2-3C-BK	40	120-277	3 000/3 500/4 000	4 844	121	80+	54 000	Black	>0.9	<15	6
Direct/Indirect												
68578	L1KCL-G2-4LS2U-3C-WH	40	120-277	3 000/3 500/4 000	4 361 ⁵	109	80+	54 000	White	>0.9	<15	6
68579	L1KCL-G2-4LS2U-3C-BK	40	120-277	3 000/3 500/4 000	4 361 ⁵	109	80+	54 000	Black	>0.9	<15	6
8'												
Direct												
68580	L1KCL-G2-8LS1-3C-WH	80	120-277	3 000/3 500/4 000	9 760	122	80+	54 000	White	>0.9	<15	4
68581	L1KCL-G2-8LS1-3C-BK	80	120-277	3 000/3 500/4 000	9 760	122	80+	54 000	Black	>0.9	<15	4
Direct/Indirect												
68582	L1KCL-G2-8LS1U-3C-WH	80	120-277	3 000/3 500/4 000	8 800 ⁵	110	80+	54 000	White	>0.9	<15	4
68583	L1KCL-G2-8LS1U-3C-BK	80	120-277	3 000/3 500/4 000	8 800 ⁵	110	80+	54 000	Black	>0.9	<15	4

ACCESSORY

Order code	Model number	Type
68584	KIT-CK2	Joiner kit for row mounting

* Please ensure to order a new kit for every fixture added.

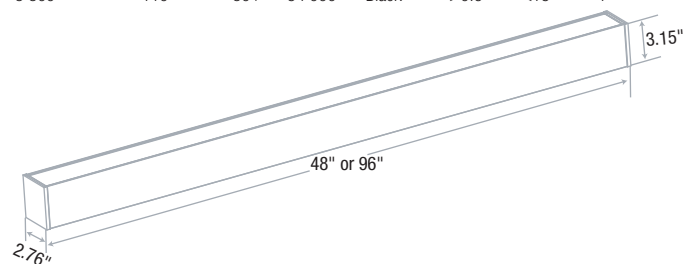

6


damp location





KOLIKA

Our Kolika Quick Ship LED offers an energy-efficient, low maintenance luminaire that accommodates most design applications. The light weight and easy to install L1KCL is designed to offer maximum energy savings, substantially reduced maintenance costs and superior quality.

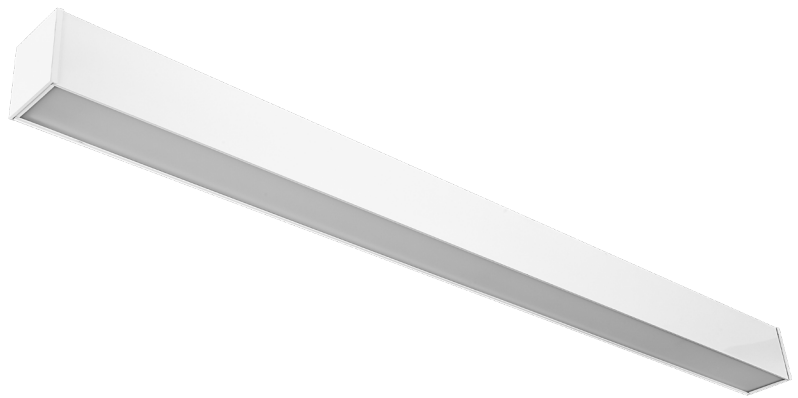


Model number	DLC unique ID	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen (lm) ³	Efficiency (lm/W)	CRI	Life L70 (hrs)	Finish	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
4"													
L1KCL-4LS1/35K	-	23	120-277	3 500	2 500	109	80+	50 000	White	Yes	>0.9	<20	6
L1KCL-4LS1/40K	-	23	120-277	4 000	2 500	109	80+	50 000	White	Yes	>0.9	<20	6
L1KCL-4LS2/35K	PLJ5K47QKBTY	42	120-277	3 500	5 000	120	80+	50 000	White	Yes	>0.9	<20	6
L1KCL-4LS2/40K	PLHORJWP3H7Q	42	120-277	4 000	5 000	120	80+	50 000	White	Yes	>0.9	<20	6
8"													
L1KCL-8LS1/35K	PLUSL93ZBW72	85	120-277	3 500	9 900	116	80+	50 000	White	Yes	>0.9	<20	4

ACCESSORY

Description	Type
KIT-GEN-CK	Joiner kit for row mounting ¹

¹ Please ensure to order a new kit for every fixture added.

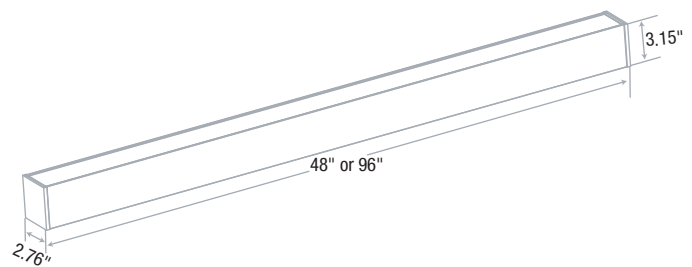




T-GRID LED LINEAR LIGHT

The L3CTG is available in 2' and 4' which can be compatible to 15/16" standard suspended ceilings system. This product offers lighting designers more freedom to design since the LED module can follow the ceiling elements in many different ways. It is suitable for commercial and architectural environments that require a unique and elegant lighting design.




Order code	Model number	DLC unique ID	Width (in)	Watts (W)	Color temp. (K) ²	Lumen (lm) ²	Efficiency (lm/W)	CRI	Life L70 (hrs) ⁴	Cable rating	Lens finish	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
2"															
68025	L3CTG-0215LS1/35K	PL5RUZGG1HAH	15/16	10	3 500	1 260	126	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18
68026	L3CTG-0215LS1/40K	PLA2M5KQGITF	15/16	10	4 000	1 320	132	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18
4"															
68027	L3CTG-0415LS2/35K	PLBJ29RKPG4E	15/16	20	3 500	2 540	127	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18
68028	L3CTG-0415LS2/40K	PLERYM5Z9ZTU	15/16	20	4 000	2 670	133	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18

L3CTG-02

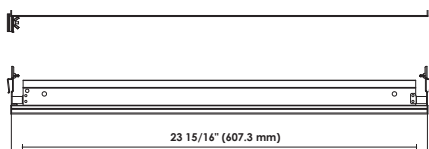

L3CTG-04

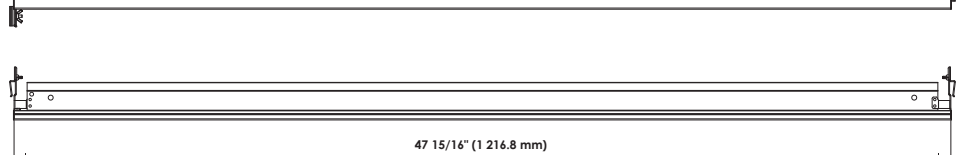




EDGE

The EDGE is a linear suspended LED luminaire offering excellent uniform direct/indirect lighting distribution making it the perfect addition to any modern office space. This versatile luminaire can be mounted individually in 4' and 8' sections or it can also be joined to create a continuous row system providing linear illumination.




Part number	Watts (W)	Volt (VAC)	Color temp. (K)	Lumen (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Dimming (Yes/No)	Finish	Power factor	THD (%)	Case qty (master)
4"												
L1DIP-4LS1/35K	40	120-277	3 500	4 200	105	80+	50 000	Yes	White	>0.9	<20	3
L1DIP-4LS1/40K	40	120-277	4 000	4 200	105	80+	50 000	Yes	White	>0.9	<20	3
8"												
L1DIP-8LS1/40K	80	120-277	4 000	8 400	105	80+	50 000	Yes	White	>0.9	<20	2

L1DIP-4

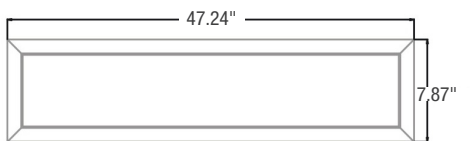

L1DIP-8

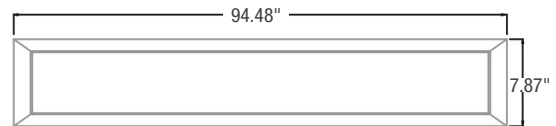





LED Armonia™ Slim Line Bar (24 V)


These LED Armonia™ Slim Line Bars are the perfect fit for multiple applications whether residential or commercial, such as undercabinet lighting, cove lighting, shelves and work stations. These interconnectable LED bars are easy to install and assemble. These bars neatly define contours of shapes with or without interruption and they ensure high quality lighting. The Armonia™ series allows you to build a system that is adapted to your needs without any cutting or soldering.

- Linkable bars that provide continuous lighting
- Aluminum housing for better heat dissipation
- Constant current design will ensure the brightness and color consistency from end-to-end
- Slim design – Thickness of 9 mm
- Maximum run: 120 W or 26.2' (8 m)



LED SLIM LINE BARS

Order code	Description	Watts (W)	Volts (VDC)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam Angle (°)	Lens finish	Dimmable (Yes/No)	Case qty (master)
5.9"												
64576	LUCS/5.9IN/2.5W/27K/STD	2.5	24	2 700	180	72	82	25 000	120	Frosted polycarbonate	Yes	40
64577	LUCS/5.9IN/2.5W/30K/STD	2.5	24	3 000	200	80	82	25 000	120	Frosted polycarbonate	Yes	40
64578	LUCS/5.9IN/2.5W/40K/STD	2.5	24	4 000	210	84	82	25 000	120	Frosted polycarbonate	Yes	40
11.8"												
64579	LUCS/11.8IN/5W/27K/STD	5	24	2 700	400	80	82	25 000	120	Frosted polycarbonate	Yes	40
64580	LUCS/11.8IN/5W/30K/STD	5	24	3 000	420	84	82	25 000	120	Frosted polycarbonate	Yes	40
64581	LUCS/11.8IN/5W/40K/STD	5	24	4 000	420	90	82	25 000	120	Frosted polycarbonate	Yes	40
23.6"												
64582	LUCS/23.6IN/9W/27K/STD	9	24	2 700	700	78	82	25 000	120	Frosted polycarbonate	Yes	40
64584	LUCS/23.6IN/9W/40K/STD	9	24	4 000	760	84	82	25 000	120	Frosted polycarbonate	Yes	40
39.3"												
64585	LUCS/39.3IN/15W/27K/STD	15	24	2 700	1 100	73	82	25 000	120	Frosted polycarbonate	Yes	40
64586	LUCS/39.3IN/15W/30K/STD	15	24	3 000	1 200	80	82	25 000	120	Frosted polycarbonate	Yes	40
64587	LUCS/39.3IN/15W/40K/STD	15	24	4 000	1 250	83	82	25 000	120	Frosted polycarbonate	Yes	40

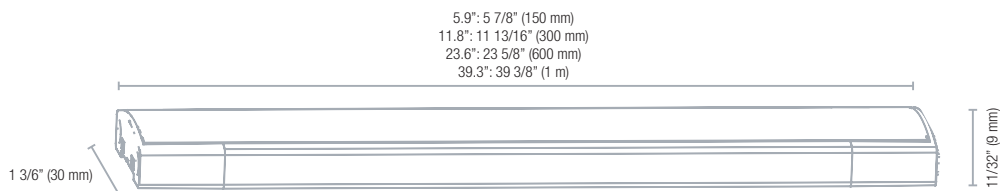

INCLUDED IN THE BOX

5.9"	1 middle connector and 1 fixing clip – 180°
11.8" / 23.6"	1 middle connector and 2 fixing clips – 180°
39.3"	1 middle connector and 3 fixing clips – 180°



Lumen values are derived from photometric testing
 For a complete list of compatible dimmers, please visit www.standardpro.com
 For a flat installation, remove the knockouts on both ends of the LED bar



ICES
005



constant
current



dimmmable
fixture



dry
location




LED DRIVER (24 V)¹

Order code	Part number	Watts (W)	Volts (VAC)	Output Volts (VDC)	Input Current (mA)	Output current (mA)	Frequency (Hz)	Finish	VDC Connector (Yes/No)	IP rating	Case qty (master)
HARDWIRE - DIMMABLE											
64864	LUC/PS/50W/24VDC/HW/D/STD	50	100-240	24	1 600	2 100	50/60	White	Yes	IP20	10
65742	LED/DRIVER/96W/24V/HW/D/STD	96	100-130	24	800	-	50/60	White	No	IP67	10
HARWIRE - NON-DIMMABLE											
65747	LED/DRIVER/96W/24V/HW/ND/STD	96	100-277	24	1 400	-	47/63	White	No	IP66	10
PLUG-IN - NON-DIMMABLE											
64575	LUC/PS/120W/24VDC/PLUG/STD	120	100-240	24	1 600	5 000	50/60	Black	Yes	IP20	20


¹ Technical drawings and dimensions on page 34

ACCESSORIES

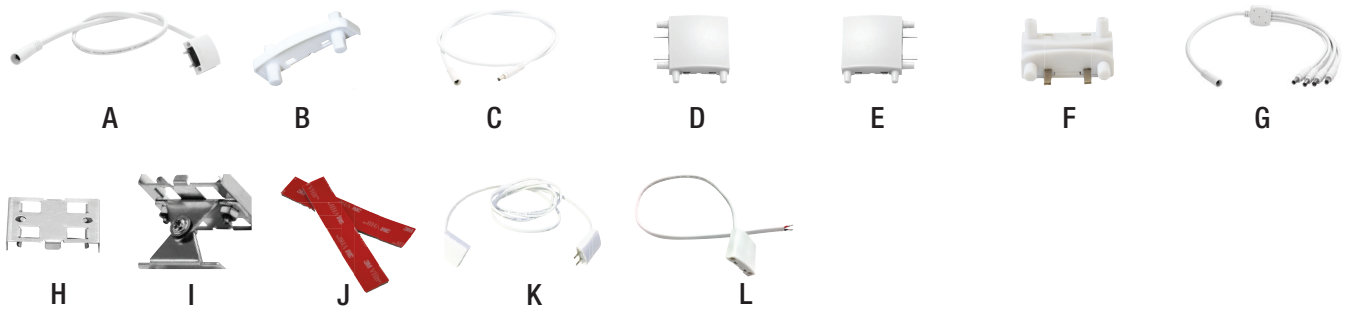

Order code	Description	Type	Figure	Length (in)	Length (mm)	Case qty (master)
CABLE CONNECTORS						
64559	LUCS/ACC/CBL/SENSOR/STD	Cable connector with sensor switch	A	22 3 /16	563.5	100
64560	LUCS/ACC/CBL/DIM/STD	Cable connector with dimmable switch	A	22 3 /16	563.5	100
ACCESSORIES						
64561	LUCS/ACC/MIDCNT/STD 2P	Middle connector (pack of 2)	B	-	-	500
64562	LUCS/ACC/CBL/EXT/STD	36" extension cable	C	36	914	50
64564	LUCS/ACC/LCORNERCNT/STD	Left corner connector	D	-	-	200
64565	LUCS/ACC/LCORNERCNT/STD	Right corner connector	E	-	-	200
64566	LUCS/ACC/VERTICALCNT/STD	Vertical connector (90°)	F	-	-	200
64863	LUCS/ACC/4WAY/STD	Extension cable - four ways	G	20	520	50
MOUNTING OPTIONS (PACK OF 2)						
64554	LUCS/ACC/FIXCLIP180/STD 2P	180° fixing clips	H	-	-	500
64555	LUCS/ACC/FIXCLIPADJUST/STD 2P	Adjustable fixing clips	I	-	-	500
64556	LUCS/ACC/TAPE10CM/STD 2P	3M tape (10 cm)	J	-	-	500
JUMPERS						
64967	LUCS/ACC/JUMPER 54"/STD	54" jumper	K	54	1 372	100
66356	LUCS/ACC/WIRE_TO_FEMALE/EXT/STD	Female to wire connector	L	12	305	125

Order code	Description	Figure	Watts (W)	Volts (VDC)	Colour temp. (K)	CRI	Lumen output (lm)	Beam angle (°)	Case qty (master)
LIGHT CONNECTORS 3.7"									
64567	LUCS/ACC/LIGHTEDCNT/27K/STD	0	1	24	2 700	82	80	120	100
64568	LUCS/ACC/LIGHTEDCNT/30K/STD	0	1	24	3 000	82	90	120	100
64569	LUCS/ACC/LIGHTEDCNT/40K/STD	0	1	24	4 000	82	100	120	100





LED Swivel (120 V)

The LED Swivel is the perfect solution to replace traditional Xenon undercabinet luminaires. Working directly off of line voltage, no LED driver is required and hardwired connections can be made directly inside the luminaire. For a quick and easy installation, use the 120V power cord plug to make the connection to the power outlet.

The LED Swivel also offers the option to swivel the module and direct the light where desired, depending on the needs of the application. The selectable color temperature feature enables to set the light to the right mood or activity; whether you need a warm and cozy atmosphere or a cooler task lighting.



- Selectable color temperature switch - 2 700 K / 3 000 K / 4 000 K
- Selectable power switch - two intensities
- For an installation without interruption, use the end to end connector
- Up to 300 W can be daisy chained
- 5 different lengths available


LED SWIVEL

Order code	Part number	Watts (W)	Volts (VCA)	Color temp. (K) ²	Lumen output (lm) ²	Efficiency (lm/W)	CRI	Life L70 (hrs) ⁴	Beam Angle (°)	Housing finish	Lens finish	Dimmable (Yes/No)	Power Factor	THD (%)	Case qty (master)
9"															
68481	UCS/9IN/120V/3W/SEL/FR/WH	1.5/3	120	2 700/3 000/4 000	108/204	58	90	50 000	102	White	Frosted	Yes	>0.90	<15	10
12"															
67194	UCS/12IN/120V/5W/SEL/FR/WH/STD	2.5/5	120	2 700/3 000/4 000	195/359	60	90	50 000	102	White	Frosted	Yes	>0.90	<15	10
18"															
67195	UCS/18IN/120V/8W/SEL/FR/WH/STD	4/8	120	2 700/3 000/4 000	365/624	65	90	50 000	102	White	Frosted	Yes	>0.90	<15	10
24"															
67196	UCS/24IN/120V/12W/SEL/FR/WH/STD	6/12	120	2 700/3 000/4 000	508/906	67	90	50 000	104	White	Frosted	Yes	>0.90	<15	10
32"															
67197	UCS/32IN/120V/16W/SEL/FR/WH/STD	8/16	120	2 700/3 000/4 000	573/1 038	66	90	50 000	104	White	Frosted	Yes	>0.90	<15	10

¹Lower lumen output / ²Highest lumen output at 3000K


INCLUDED IN THE BOX

Quantity	Description
1	Installation Sheet
1	1/2" Romex Hardwired Connector
1	End to End Connector
2	Mounting screws

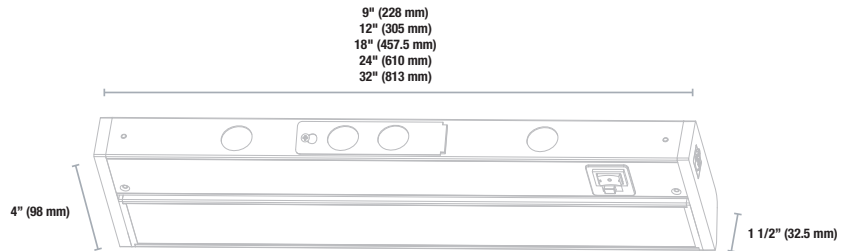

ACCESSORIES

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67203	UCS/JUMPER/6IN/STD	6" Jumper	B	6 (152.5)	500
67204	UCS/JUMPER/24IN/STD	24" Jumper	B	24 (610)	250
67205	UCS/JUMPER/36IN/STD	36" Jumper	B	36 (914)	100
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box	C	6.5 (165)	50

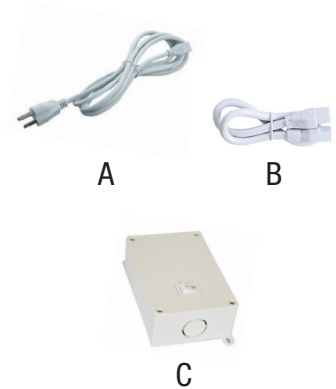

Lumen values are derived from photometric testing
For a complete list of compatible dimmers, please visit www.standardpro.com





FLUO LED (120 V)

The FLUO LED is designed for 120 V applications and is easy and quick to install as no driver is required. With its seamless look, the FLUO LED is the ideal replacement for traditional fluorescent undercabinet or task lighting for either residential and commercial applications.




- Aluminum housing for better heat dissipation
- On/Off switch directly on the luminaire
- Frosted lens

LED FLUO

Order Code	Part number	Watts (W)	Volts (VCA)	Color Temp. (K) ²	Lumen Output (lm) ³	Efficacy (lm/W)	CRI	Life L70 (hrs) ⁴	Beam Angle (°)	Housing finish	Lens finish	Dimmable (Yes/No)	Power Factor	THD (%)	Case qty (master)
9"															
68478	UCFL/9IN/120V/3W/30K/FR/WH	3	120	3 000	235	78	90	50 000	120	White	Frosted	Yes	>0.90	<15	20
68479	UCFL/9IN/120V/3W/40K/FR/WH	3	120	4 000	235	78	90	50 000	120	White	Frosted	Yes	>0.90	<15	20
12"															
67251	UCFL/12IN/120V/5W/30K/FR/WH/STD	5	120	3 000	360	72	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67252	UCFL/12IN/120V/5W/40K/FR/WH/STD	5	120	4 000	360	72	90	35 000	120	White	Frosted	Yes	0.95	<15	20
24"															
67253	UCFL/24IN/120V/10W/30K/FR/WH/STD	10	120	3 000	730	73	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67254	UCFL/24IN/120V/10W/40K/FR/WH/STD	10	120	4 000	730	73	90	35 000	120	White	Frosted	Yes	0.95	<15	20
36"															
67255	UCFL/36IN/120V/15W/30K/FR/WH/STD	15	120	3 000	1 050	70	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67256	UCFL/36IN/120V/15W/40K/FR/WH/STD	15	120	4 000	1 050	70	90	35 000	120	White	Frosted	Yes	0.95	<15	20
48"															
67257	UCFL/48IN/120V/20W/30K/FR/WH/STD	20	120	3 000	1 450	73	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67258	UCFL/48IN/120V/20W/40K/FR/WH/STD	20	120	4 000	1 450	73	90	35 000	120	White	Frosted	Yes	0.95	<15	20
60"															
67259	UCFL/60IN/120V/25W/30K/FR/WH/STD	25	120	3 000	1 740	70	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67260	UCFL/60IN/120V/25W/40K/FR/WH/STD	25	120	4 000	1 740	70	90	35 000	120	White	Frosted	Yes	0.95	<15	20

Dimension	A
9"	228.50 mm
12"	305 mm
24"	610 mm
36"	915 mm
48"	1 220 mm
60"	1 524 mm

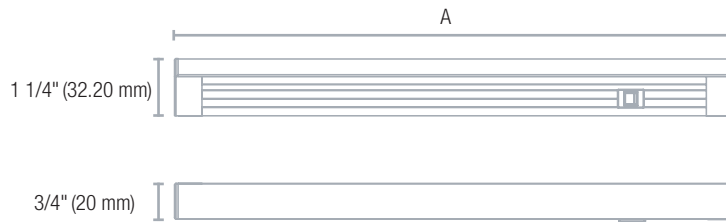

INCLUDED IN THE BOX

Quantity	Description
1	Installation Sheet
2	Fixing clips
1	End to End Connector
2	Mounting screws

ACCESSORIES

Order code	Description	Type
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug
67203	UCS/JUMPER/6IN/STD	6" Jumper
67204	UCS/JUMPER/24IN/STD	24" Jumper
67205	UCS/JUMPER/36IN/STD	36" Jumper





LED Puck Light (120 V)


There is need for an LED driver with the line voltage models, as they can be used directly with the 120 V power cord plug for a quick and simple installation. They can also be installed with the hardwire box for direct connections. The option of surface mounting or recessed installation also adds to the versatility of these LED puck lights.

- Recessed and surface mount installation
- Up to 20 LED puck lights can be installed in a row
- Sturdy aluminum housing to better dissipate the heat
- Gimbal feature to reduce glare and direct the light where needed




LED PUCK LIGHTS - LINE VOLTAGE (120 V)

Order code	Description	Watts per LED puck (W)	Volts (VAC)	Color temp. (K)	Lumen output per LED puck (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Dimming (Yes/No)	Case qty (master)
LED Puck Light - 1 Wire													
67101	UCP/1WIRE/120V/4W/30K/FR/WH/STD	4	120	3 000	200	50	90	36 000	120	White	Frosted	Yes	50
67104	UCP/1WIRE/120V/4W/30K/FR/BN/STD	4	120	3 000	200	50	90	36 000	120	Brushed nickel	Frosted	Yes	50
LED Puck Light - 2 Wires													
67100	UCP/2WIRES/120V/4W/30K/FR/WH/STD	4	120	3 000	200	50	90	36 000	120	White	Frosted	Yes	50
67103	UCP/2WIRES/120V/4W/30K/FR/BN/STD	4	120	3 000	200	50	90	36 000	120	Brushed nickel	Frosted	Yes	50
LED Puck Light - Kits of 3 units													
67102	UCP/KIT3/120V/4W/30K/FR/WH/STD	4	120	3 000	200	50	90	36 000	120	White	Frosted	Yes	20
67105	UCP/KIT3/120V/4W/30K/FR/BN/STD	4	120	3 000	200	50	90	36 000	120	Brushed nickel	Frosted	Yes	20

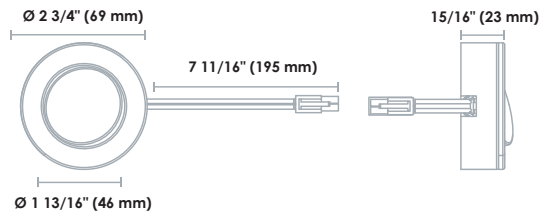


1 Wire

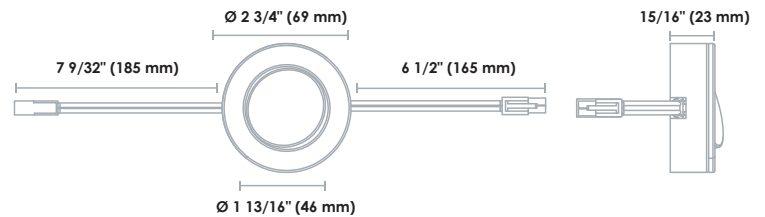

2 Wires

ACCESSORIES

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67106	UCP/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box	B	165	50
67108	UCP/JUMPER/12IN/STD	12" Jumper	C	12 (304)	500
67109	UCP/JUMPER/36IN/STD	36" Jumper	C	36 (914)	500
67110	UCP/JUMPER/72IN/STD	72" Jumper	C	72 (1 828)	250



INCLUDED IN THE BOX (KITS OF 3 UNITS)

- 1 Wire LED Puck - 1 unit
- 2 Wires LED Puck - 2 units
- 120 V Power Cord Plug - 1 unit

Lumen values are derived from photometric testing
For a complete list of compatible dimmers, please visit www.standardpro.com





LED Puck Light

- LOW VOLTAGE (12 V)

Stanpro's low voltage LED puck line has a sleek and modern look, with the slimmest profile on the market. Its magnetic design also allows to change the trim finish and the backplate to create a whole new look!

- Up to 10 LED puck lights can be installed in row
- Recessed and surface mount installation
- Sleek 7 mm profile




Order code	Description	Watts per LED puck (W)	Volts (VAC)	Color temp. (K)	Lumen output per LED puck (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Dimming (Yes/No)	Case qty (master)
LED Puck Light													
67168	UCP/12V/2.2W/30K/FR/WH/STD	2.2	12	3 000	150	68	90	50 000	120	White	Frosted	Yes	200
67170	UCP/12V/2.2W/40K/FR/WH/STD	2.2	12	4 000	150	68	90	50 000	120	White	Frosted	Yes	200
67172	UCP/12V/2.2W/30K/FR/BLK/STD	2.2	12	3 000	150	68	90	50 000	120	Black	Frosted	Yes	200
67174	UCP/12V/2.2W/40K/FR/BLK/STD	2.2	12	4 000	150	68	90	50 000	120	Black	Frosted	Yes	200
67176	UCP/12V/2.2W/30K/FR/BN/STD	2.2	12	3 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	200
67178	UCP/12V/2.2W/40K/FR/BN/STD	2.2	12	4 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	200
LED Puck Light - Kits of 3 units													
67169	UCP/KIT3/12V/2.2W/30K/FR/WH/STD	2.2	12	3 000	150	68	90	50 000	120	White	Frosted	Yes	30
67171	UCP/KIT3/12V/2.2W/40K/FR/WH/STD	2.2	12	4 000	150	68	90	50 000	120	White	Frosted	Yes	30
67173	UCP/KIT3/12V/2.2W/30K/FR/BLK/STD	2.2	12	3 000	150	68	90	50 000	120	Black	Frosted	Yes	30
67175	UCP/KIT3/12V/2.2W/40K/FR/BLK/STD	2.2	12	4 000	150	68	90	50 000	120	Black	Frosted	Yes	30
67177	UCP/KIT3/12V/2.2W/30K/FR/BN/STD	2.2	12	3 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	30
67179	UCP/KIT3/12V/2.2W/40K/FR/BN/STD	2.2	12	4 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	30



ACCESSORIES (ORDER SEPARATELY)

Order code	Description	Type	Figure	Case qty (inner/master)
67180	UCP/TRIM/BACKPLATE/WH/STD	White Trim and Backplate	A	50 / 200
67181	UCP/TRIM/BACKPLATE/BLK/STD	Black Trim and Backplate	B	50 / 200
67182	UCP/TRIM/BACKPLATE/BN/STD	Brushed nickel Trim and Backplate	C	50 / 200
67183	UCP/ACC/HUB6/STD	Hub for 6 LED Puck Lights	D	30 / 120
67184	LED/DRIVER/12W/12V/PLUG/ND/STD	Plug-in driver	E	- / 80
67185	UCP/ACC/DIMMER/STD	Dimmer Switch	F	30 / 120
67186	UCP/ACC/MOTIONSENSOR/STD	Motion Sensor	G	30 / 120

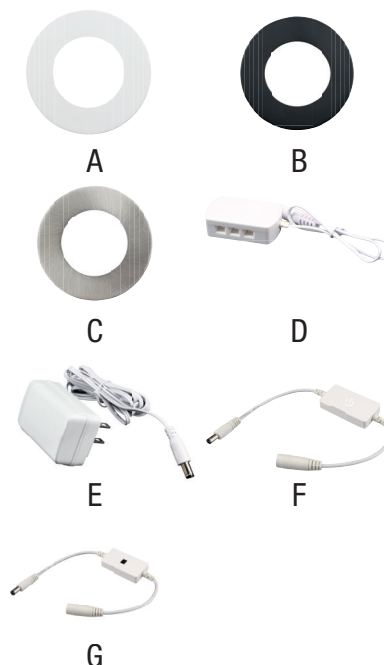

INCLUDED IN THE BOX (KITS OF 3 UNITS)

LED Puck Lights - 3 units

12 V Plug-in LED Driver (12 W) - 1 unit

Lumen values are derived from photometric testing
For a complete list of compatible dimmers, please visit www.standardpro.com




LED BARE WIRE PUCK LIGHTS

- Up to 10 LED puck lights can be installed in row
- The bare wires allow you to run the desired wire length between each puck
- Recessed installation only



Order code	Description	Watts per LED puck (W)	Volts (VAC)	Color temp. (K)	Lumen output per LED puck (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Dimming (Yes/No)	Case qty (master)
LED puck light													
67187	UCP/WIRES/12V/2W/30K/FR/WH/STD	2	12	3 000	120	60	90	50 000	120	White	Frosted	Yes	240

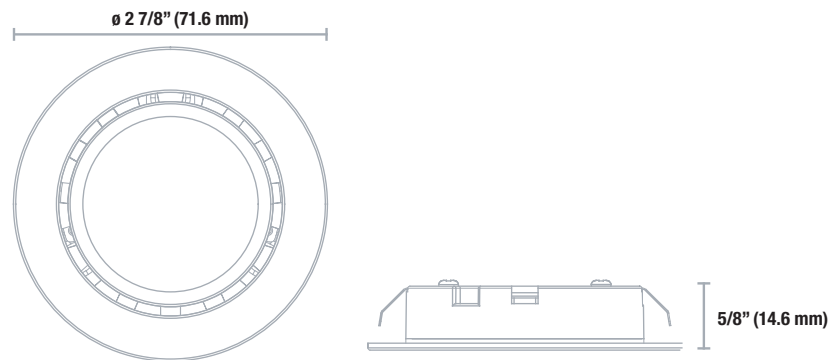

LED DRIVERS COMPATIBLE WITH 12V PUCKS¹

Order code	Description	Output power (W)	Input voltage (VAC)	Output voltage (VDC)	Input current (mA)	Frequency (Hz)	Power factor	Finish	Case qty (master)
Plug-in - Non-Dimmable									
67184	LED/DRIVER/12W/12V/PLUG/ND/STD	12	100-240	12	1 000	50/60	0.50	White	80
62265	LED/TAPE/36W/12V/WW+CW/PS/ND/STD	36	100-240	12	1 500	50/60	0.80	White	100
Hardwired - Dimmable									
65740	LED/DRIVER/50W/12V/HW/D/STD	50	100-130	12	410	50/60	0.95	White	20
Hardwired - Non-Dimmable									
65743	LED/DRIVER/10W/12V/HW/ND/STD	10	100-240	12	220	50/60	0.50	White	100
65744	LED/DRIVER/20W/12V/HW/ND/STD	20	100-240	12	250	50/60	0.90	White	100
65745	LED/DRIVER/60W/12V/HW/ND/VS/STD	60	100-240	12	1 100	50/60	0.50	White	30
65746	LED/DRIVER/60W/12V/HW/ND/STD	60	90-264	12	1 400	47/63	0.93	White	10

¹ Technical drawings and dimensions on page 36






DUOLED Hardwired Driver and Dimmer Switch

Stanpro's DUOLED offers an innovative compact design, combining a dimmer switch and an LED hardwired driver. It converts line voltage (120 VAC) into low voltage (12 VDC / 24 VDC), while offering outstanding dimming performances.

Having both products combined into one also eliminates the compatibility issues that are often seen between LED drivers and dimmer switches. DUOLED also offers a timeless and sleek look with a glossy white finish to blend seamlessly with your design.

- Converts line voltage (120 VAC) into low voltage (12 VDC / 24 VDC)
- Eliminates compatibility issues between the driver and the dimmer
- Excellent dimming performance (1% -100% dimming)

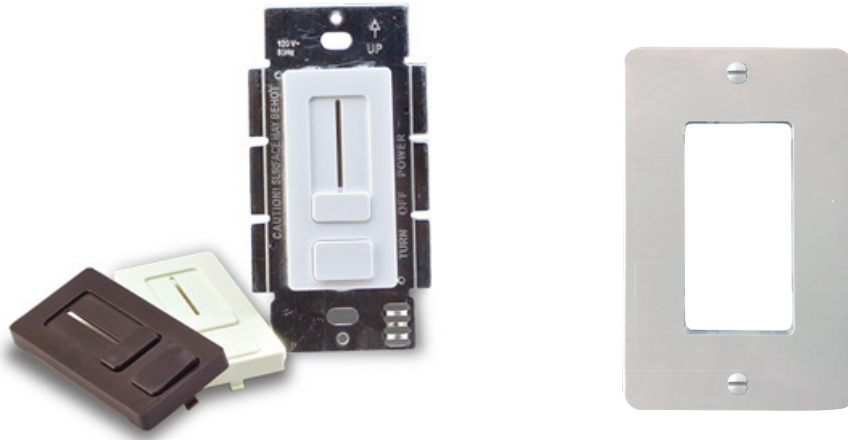


Order code	Description	Watts (W)	Volts (VAC)	Output Voltage (VDC)	Input Current (mA)	Frequency (Hz)	Power Factor	Face plate Finish	Case qty (master)
68299	DRIVER-DIMMER/S2/12V/60W	60	120	12	1 000	60	0.9	Glossy Dark Brown, Glossy Light Almond and Glossy White	25
68829	DRIVER-DIMMER/S2/24V/100W	100	120	24	1 000	60	0.9	Glossy Dark Brown, Glossy Light Almond and Glossy White	25

ACCESSORY (ORDER SEPARATELY)


Part number	Type	Finish / color	Case qty (master)
67073	DRIVER-DIMMER/TRIM/WH/STD	Glossy White	100

INCLUDED IN THE BOX

Quantity	Description
1	DuoLED
1	Barrier
3	Switch Plate
4	Twisted wire connectors
2	Mounting Screws

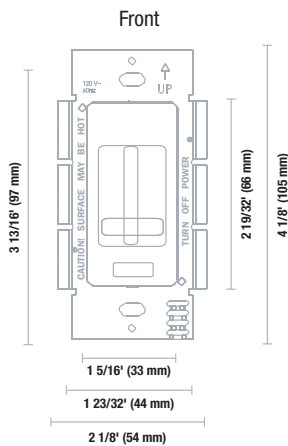


DUOLED

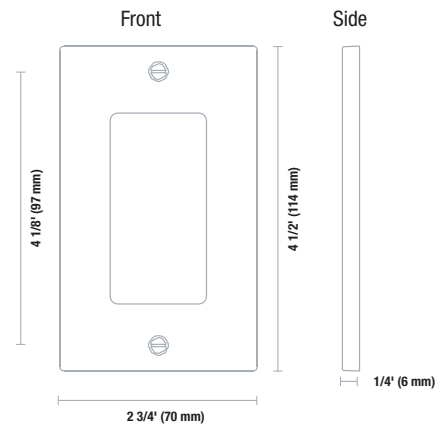

Trim Plate

COMPATIBLE STANPRO PRODUCTS

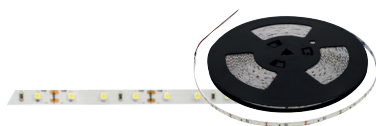

12 V / 24 V LED Tapes



24V Armonia™ LED Bars





LED Tape and Extrusion

Stanpro LED tapes allow the customization of any area, as they can be surface mounted, recessed or suspended. These professional grade flexible LED tapes are ideal for a wide variety of applications, such as cabinetry, shelving, toe kicks, coves, edge lighting, etc.

Made of high quality LED chips, Stanpro's tapes offer durability, dimmability, high efficacy, constant color and a CRI above 90. They will easily adapt to all task or accent lighting needs.

The tapes can be installed on their own with peel and stick 3M construction adhesive back or within a covered aluminum extrusion for a diffused effect (except RGB and IP67 tapes). A wide variety of accessories are also available to complete the luminaire and allow for easy assembly; no soldering is needed with Stanpro's range of sturdy connectors.

All Stanpro tapes (except IP67), extrusions and lenses are also offered in custom lengths. Contact our Inside Sales team with your requirements to receive a quote on made to measure components.


Note: a minimum of ¼ inch must be kept free of tape at each end of the extrusion length to allow for the end caps.



LED Tape

Order code	Description	Order code for custom length ²	Watts		Volts (VAC)	Color temp. (K)	Lumen (lm) ³		Efficiency (lm/W)	CRI	Life L70 (hrs)	Power factor	Case qty (master)
			(per ft.)	(per m)			(per ft.)	(per m)					
12 V - 16.4' (5 m)													
65895	TAPE/16.4'/1.5W/30K/12V/IP22/60/8MM/STD	66327	1.5	4.8	12	3 000	110	360	75	90+	50 000	>0.9	25
65880	TAPE/16.4'/1.5W/40K/12V/IP22/60/8MM/STD	66328	1.5	4.8	12	4 000	123	405	84	90+	50 000	>0.9	25
24 V - 16.4' (5 m)													
65881	TAPE/16.4'/1.5W/30K/24V/IP22/60/8MM/STD	66329	1.5	4.8	24	3 000	107	350	73	90+	50 000	>0.9	25
65882	TAPE/16.4'/1.5W/40K/24V/IP22/60/8MM/STD	66330	1.5	4.8	24	4 000	109	356	74	90+	50 000	>0.9	25
65883	TAPE/16.4'/2.9W/24K/24V/IP22/120/8MM/STD	66331	2.9	9.6	24	2 400	172	566	76	90+	50 000	>0.9	25
65884	TAPE/16.4'/2.9W/27K/24V/IP22/120/8MM/STD	66332	2.9	9.6	24	2 700	191	625	65	90+	50 000	>0.9	25
65885	TAPE/16.4'/2.9W/30K/24V/IP22/120/8MM/STD	66334	2.9	9.6	24	3 000	194	635	66	90+	50 000	>0.9	25
65886	TAPE/16.4'/2.9W/35K/24V/IP22/120/8MM/STD	66333	2.9	9.6	24	3 500	204	670	70	90+	50 000	>0.9	25
65887	TAPE/16.4'/2.9W/40K/24V/IP22/120/8MM/STD	66338	2.9	9.6	24	4 000	226	740	77	90+	50 000	>0.9	25
65888	TAPE/16.4'/2.9W/50K/24V/IP22/120/8MM/STD	66335	2.9	9.6	24	5 000	228	749	78	90+	50 000	>0.9	25
65893 ⁴	TAPE/16.4'/2.9W/30K/24V/IP67/120/8MM/STD	-	2.9	9.6	24	3 000	186	609	63	90+	50 000	>0.9	25
65894 ⁴	TAPE/16.4'/2.9W/40K/24V/IP67/120/8MM/STD	-	2.9	9.6	24	4 000	213	697	73	90+	50 000	>0.9	25
65889	TAPE/16.4'/4.4W/30K/24V/IP22/180/8MM/STD	66336	4.4	14.5	24	3 000	300	984	68	90+	50 000	>0.9	25
65890	TAPE/16.4'/4.4W/40K/24V/IP22/180/8MM/STD	66337	4.4	14.5	24	4 000	314	1 030	71	90+	50 000	>0.9	25
24 V - 65.6' (20 m)													
65891	TAPE/65.6'/2.9W/30K/24V/IP22/120/8MM/STD	66334	2.9	9.6	24	3 000	194	635	66	90+	50 000	>0.9	25
65892	TAPE/65.6'/2.9W/40K/24V/IP22/120/8MM/STD	66338	2.9	9.6	24	4 000	226	740	77	90+	50 000	>0.9	25

Dimensions & Cuts

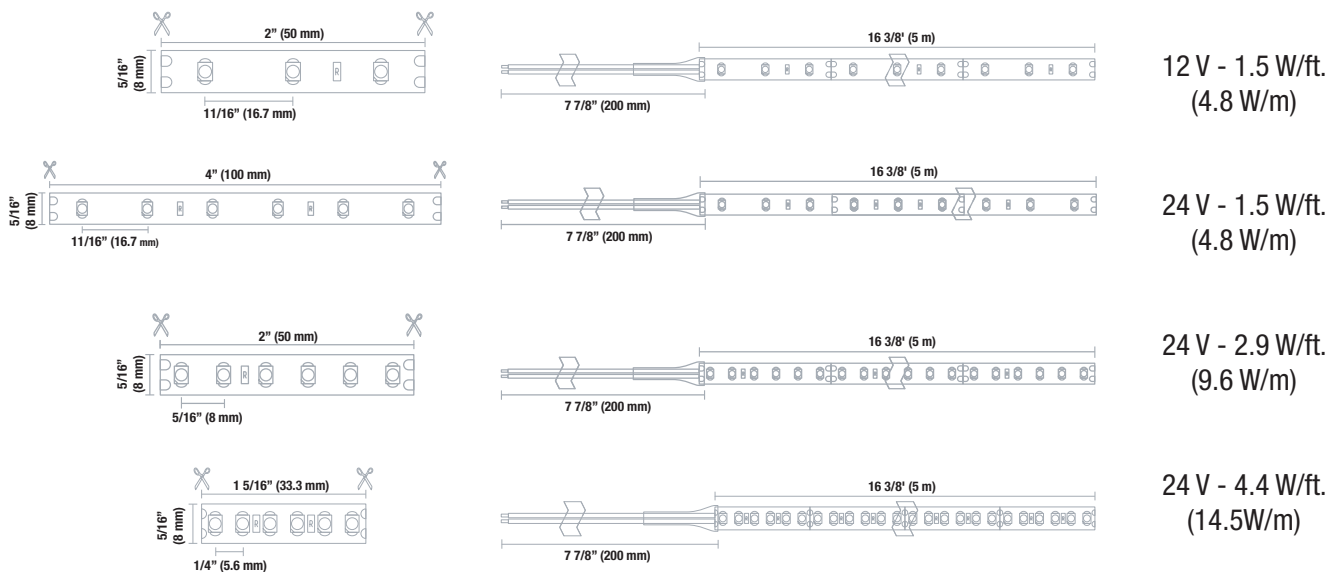


Lumen values are derived from photometric testing
 For complete warranty information, please visit www.standardpro.com
¹ Available in custom lengths with the alternative order code
² The LED tape reels are not returnable if already cut
³ Custom lengths of LED tapes are non-cancelable and non-returnable
⁴ Not compatible with Stanpro extrusion and lens products



Extrusion & Lens

Stanpro extrusions are designed to be paired with LED tapes of a width of up to 14 mm. Made of high quality aluminum, they provide a sleek and sophisticated appearance for both residential and commercial applications. Adding a lens to the extrusion will complete the look of the luminaire; four different lens finishes are available.

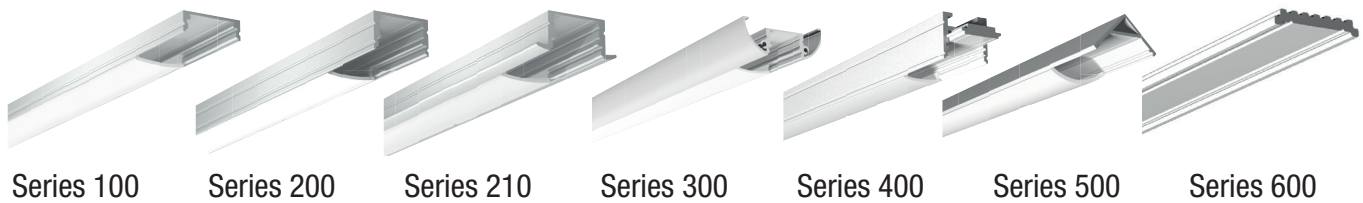

EXTRUSION

Order code	Description	Order code for custom length ¹	Series	Type	Length		Width		Height		Maximum LED tape width (mm)	Case qty (master)
					(ft.)	(m)	(in.)	(mm)	(in.)	(mm)		
65865 ²	EXTRUSION/100/8'/ALUM/STD	66341	100	Sleek	8	2.4	¾	19	¼	6	14	10
65866	EXTRUSION/200/8'/ALUM/STD	66342	200	Deep	8	2.4	¾	19	7/16	12	14	10
65867	EXTRUSION/210/RECESSED/8'/ALUM/STD	66343	210	Recessed	8	2.4	1 1/32	26	7/16	12	14	10
65869	EXTRUSION/300/ROUNDED/8'/ALUM/STD	66345	300	Rounded	8	2.4	¾	19	7/16	12	14	5
65868	EXTRUSION/400/8'/ALUM/STD	66344	400	Versatile	8	2.4	¾	19	21/32	17	14	10
65870	EXTRUSION/500/CORNER/8'/ALUM/STD	66346	500	Corner	8	2.4	¾	19	7/16	12	14	10
66678	EXTRUSION/600/HEATSINK/8'/ALUM/STD	66679	600	Heatsink	8	2.4	1/2	13	3/32	2	10	20

LENS

Clear

- 96.5% of light output
- 50 to 80 Kelvin increase

Frost


- 85% of light output
- 120 to 140 Kelvin reduction

Opal

- 65% of light output
- 190 to 240 Kelvin reduction
- Dot free with a minimum of 37 LED chips per foot (120 LED chips per meter)

Diffused

- 95% of light output
- 50 to 80 Kelvin reduction

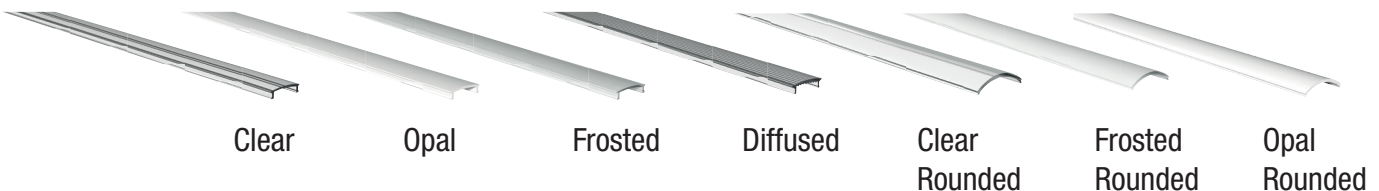

Order code	Description	Order code for custom length ¹	Finish	Length		Width		Compatible with series	Case qty (master)
				(ft.)	(m)	(in.)	(mm)		
65871	LENS/8'/CLEAR/STD	66347	Clear	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65872	LENS/8'/OPAL/STD	66348	Opal	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65873	LENS/8'/FROSTED/STD	66349	Frosted	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65874	LENS/8'/DIFFUSED/STD	66350	Diffused	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65875	LENS/8'/ROUNDED/CLEAR/STD	66351	Clear	8	2.4	31/32	25	500	20
65876	LENS/8'/ROUNDED/FROSTED/STD	66352	Frosted	8	2.4	31/32	25	500	20
65877	LENS/8'/ROUNDED/OPAL/STD	66353	Opal	8	2.4	31/32	25	500	20

Not compatible with IP67 and RGB

¹ Available in custom lengths with the alternative order code

² The series 100 (sleek) can't be used with the tape to tape or tape to wire connectors



END CAP (PACK OF 10)



Order code	Description	Type	Compatible with series	Case qty (master)
65896	EXTRUSION/100/ENDCAP/HOLE/STD	Perforated	100	50
65897	EXTRUSION/100/ENDCAP/PLAIN/STD	Plain	100	50
65898	EXTRUSION/200/ENDCAP/HOLE/STD	Perforated	200	50
65899	EXTRUSION/200/ENDCAP/PLAIN/STD	Plain	200	50
65900	EXTRUSION/210/ENDCAP/HOLE/STD	Perforated	210	50
65901	EXTRUSION/210/ENDCAP/PLAIN/STD	Plain	210	50
65904	EXTRUSION/300/ENDCAP/HOLE/STD	Perforated	300	50
65905	EXTRUSION/300/ENDCAP/PLAIN/STD	Plain	300	50
65902	EXTRUSION/400/ENDCAP/HOLE/STD	Perforated	400	50
65903	EXTRUSION/400/ENDCAP/PLAIN/STD	Plain	400	50
65906	EXTRUSION/500R/ENDCAP/HOLE/STD	Perforated	500	50
65907	EXTRUSION/500R/ENDCAP/PLAIN/STD	Plain	500	50

FIXING CLIP (PACK OF 2)



Order code	Description	Type	Figure	Compatible with series	Case qty (master)
65908	EXTRUSION/FIXCLIP/180/STD	180°	A	100, 200, 300, 400	100
65909	EXTRUSION/FIXCLIP/45/STD	45°	B	100, 200, 400	100
65910	EXTRUSION/FIXCLIP/ADJ/STD	Adjustable	C	100, 200, 400	100
65911	EXTRUSION/FIXCLIP/INV/STD	Invisible	D	400	100
65913	EXTRUSION/MAGNET/STD	Magnet	E	400	100
65912	EXTRUSION/SUSPENSIONKIT/STD	Suspension Kit (single pack)	F	400	50
65914	EXTRUSION/FIXCLIP/500/CORNER/STD	For corner	G	500	100

ACCESSORIES



Order code	Description	Type	Figure	Qty per pack	Case qty (master)
Connector					
66130 ¹	TP-CONN-SING END 1	Tape to Wire (8 mm)	A	10	300
66132	TP-CONN-IN LINE 1	Tape to Tape (8mm)	A	10	300
66239 ¹	TP-CONN-WIRE2WIRE	Wire to Wire (8mm)	B	10	300
66771 ²	TP-CONN-2WAY	Two way - Wire to Wire	C	1	100
66242 ²	TP-CONN-5WAY	Five way - Wire to Wire	D	5	200
Accessory					
66240	TP-CONN-DC-FEM	Wire to DC Female	E	1	50
66241	TP-CONN-DC-MALE	Wire to DC Male	F	1	50
66243	TP-DOUBLE-FACE-33M	Double face tape	G	1	10
67630	TP-JOIN-LSHAPE	L Shape PCB Joiner	H	1	250
67631	TP-JOIN-TSHAPE	T Shape PCB Joiner	I	1	250

¹ Compatible wire : 20-22 AWG TR64 type
² Compatible wire : 12-24 AWG



LED Driver

12 V

Order code	Description	Output power (W)	Input volts (VAC)	Output volts (VDC)	Input current (mA)	Frequency (Hz)	Power factor	Finish	DC Connector (Yes/No)	IP rating	Case qty (master)
Hardwired - Dimmable											
65740 ¹	LED/DRIVER/50W/12V/HW/D/STD	50	100-130	12	410	50/60	0.95	White	No	IP20	20
Hardwired - Non-dimmable											
65743	LED/DRIVER/10W/12V/HW/ND/STD	10	100-240	12	220	50/60	0.50	White	No	IP65	100
65744	LED/DRIVER/20W/12V/HW/ND/STD	20	100-240	12	250	50/60	0.90	White	No	IP65	100
65745	LED/DRIVER/60W/12V/HW/ND/VS/STD	60	100-240	12	1 100	50/60	0.50	White	No	IP67	30
65746	LED/DRIVER/60W/12V/HW/ND/STD	60	90-264	12	1 400	47/63	0.93	White	No	IP66	10
Plug-in - Non-dimmable											
62265 ²	LED/TAPE/36W/12V/WW+CW/PS/ND/STD	36	100-240	12	1 500	50/60	0.80	White	Yes	IP20	100



24 V

Order code	Description	Output power (W)	Input volts (VAC)	Output volts (VDC)	Input current (mA)	Frequency (Hz)	Power factor	Finish	DC Connector (Yes/No)	IP rating	Case qty (master)
Hardwired - Dimmable											
65741 ^{1,3}	LED/DRIVER/50W/24V/HW/D/STD	50	100-130	24	410	50/60	0.95	White	No	IP20	20
65742 ^{1,3}	LED/DRIVER/96W/24V/HW/D/STD	96	100-130	24	800	50/60	0.95	White	No	IP67	10
Hardwired - Non-dimmable											
65747 ³	LED/DRIVER/96W/24V/HW/ND/STD	96	100-277	24	1 400	47/63	0.93	White	No	IP66	10
Plug-in - Non-dimmable											
64573 ²	LUC/PS/36W/24VDC/PLUG/STD	36	100-240	24	1 200	50/60	0.50	Black	Yes	IP20	25
64574 ²	LUC/PS/60W/24VDC/PLUG/STD	60	100-240	24	1 200	50/60	0.50	Black	Yes	IP20	25

For a complete list of compatible dimmers, please visit www.standardpro.com

For complete warranty information, please visit www.standardpro.com


² Needs to be paired with a wire to DC Female connector (66240)

³ If used with Armonia™ LED bars systems - needs to be paired with a wire to DC male connector (66241)




Dimensions Extrusions and LED Drivers

EXTRUSIONS

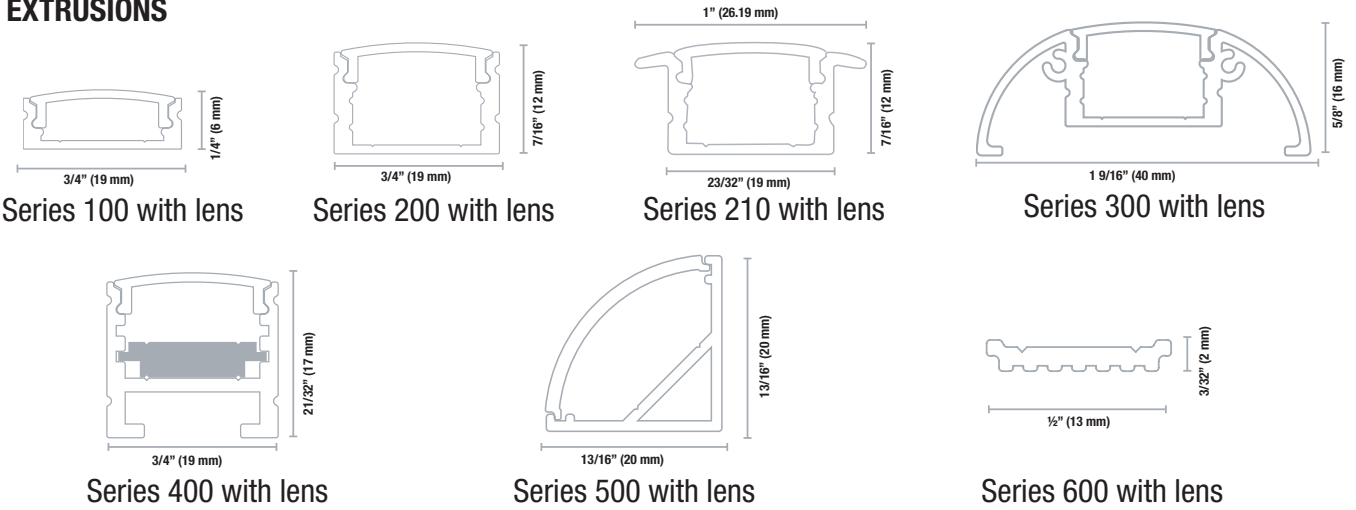

LED DRIVERS

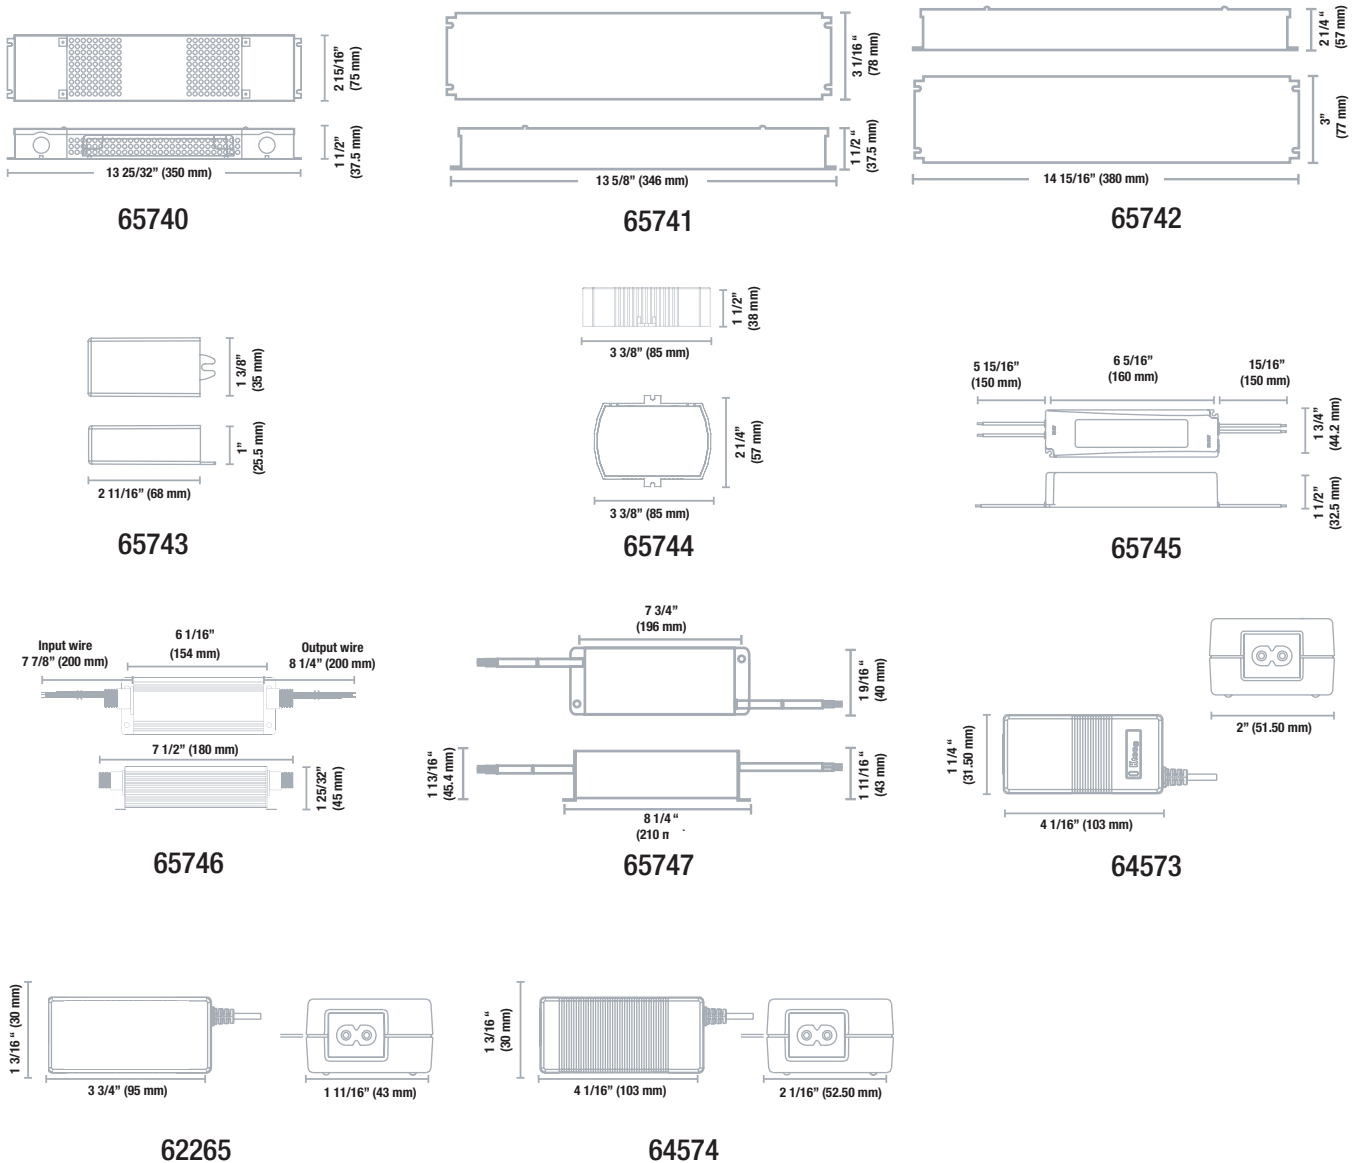

RGB LED Tape

The RGB LED Tape is ideal to add a unique touch of color to any application. It allows to change the lighting design and ambiance of an entire room with one simple click. The wireless remote control enables the selection of multiple modes, levels of brightness and the speed of color changes.



LED TAPE



Order code	Description	Order code for custom length	Watts (W) (per ft.)	Volts (VAC)	Color temp. (K)	Lumen (lm) (per ft.)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Power factor	Case qty (master)
24 V - 32.8' (10 m)											
66838	TAPE/32.8'/4.4W/RGB/24V/I P22/60/10MM/STD	66839	4.4	24	3 000	170	558	90+	44 000	>0.9	25

LED RGB WIRELESS REMOTE AND CONTROLLER


Order code	Description	Type	Controller maximum power (W)	Output volts (VDC)	Case qty (master)
66840	TAPE/RGB/CONTROLLER-REMOTE/12V-24V/STD	Radio Frequency	100	12-24	50

ACCESSORIES


Order code	Description	Type	Figure	Quantity per pack	Case qty (master)
Connector					
66131	TAPE/10MM/SINGLE_END_CONN/RGB/STD	Tape to Wire (RGB)	A	10	300
66133	TAPE/10MM/IN_LINE_CONN/RGB/STD	Tape to Tape (RGB)	B	10	300
Accessory					
66240	TAPE/WIRE_TO_DC_FEMALE/STD	Wire to DC Female	C	1	50
66241	TAPE/WIRE_TO_DC_MALE/STD	Wire to DC Male	D	1	50
66243	TAPE/DOUBLE_FACE_33M/STD	Double Face Tape	E	1	10

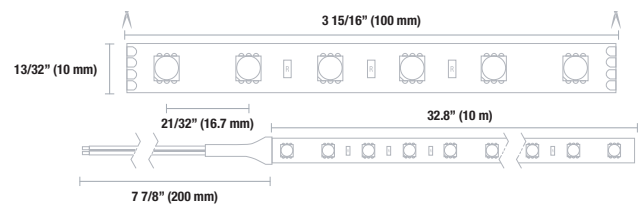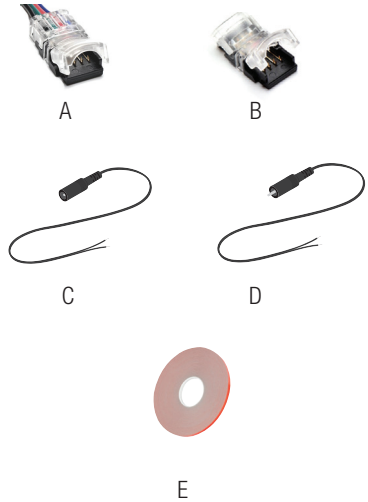

24 V - 4.4 W/ft. (14.5 W/m)

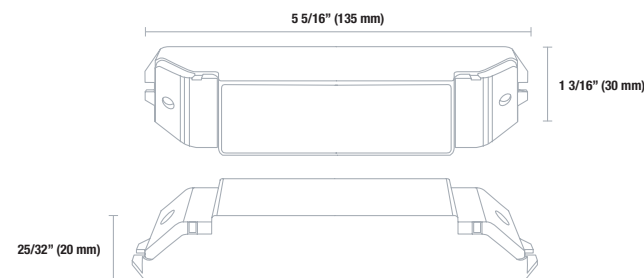

Controller

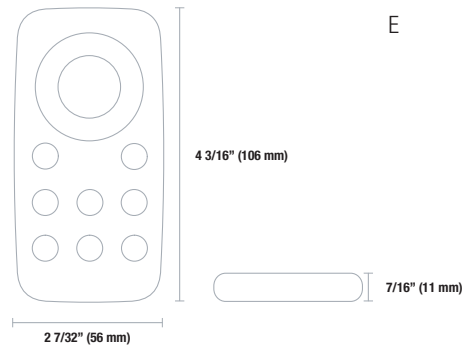

Wireless Remote

Lumen values are derived from photometric testing
For complete warranty information, please visit www.standardpro.com
* Not compatible with Stanpro extrusion and lens products
† Custom lengths of LED tapes are non-cancelable and non-returnable



LED Tape Kit


Stanpro's LED Tape kits are designed to add ambiance and character to any setting. Delivering even, brilliant light, the color changing RGB, cool white and warm white colors can be used in a multitude of applications, both indoor and outdoor, ranging from under cabinets to cove and perimeter applications.



Order code	Description	Watts per reel (W)		Volts (VDC)	Color	Length		Life L70 (hrs)	Lumen output (lm)		Number of LED chips		Dimming capability (Yes/No)	Case qty (master)
		(per ft.)	(per m)			(ft.)	(m)		(per ft.)	(per m)	(per ft.)	(per m)		
LED Tape Kits														
61953	LED/TAPE/16.4/5050/RGB KIT/12V/50M/STD	1.6	5.4	12	RGB	16.4	5	50 000	-	-	9	30	Yes	20
61954	LED/TAPE/16.4/5050/WW KIT/12V/50M/STD	1.7	5.6	12	Warm white	16.4	5	50 000	145	175.6	9	30	No	20
61955	LED/TAPE/16.4/5050/CW KIT/12V/50M/STD	1.7	5.6	12	Cool white	16.4	5	50 000	145	175.6	9	30	No	20
Plug-in Drivers - Non-dimmable														
62265	LED/TAPE/36W/12V/WW+CW/PS/ND/STD	-	-	12	White	6.56	2	-	-	-	-	-	-	50
62266	LED/TAPE/36W/12V/RGB/PS/ND/STD	-	-	12	White	6.56	2	-	-	-	-	-	-	50

ACCESSORIES

Order code	Description	Type	Case qty (inner/master)
61956	LED/TAPE/RGB/CONNECTOR/STD	RGB Connector	10/50
61957	LED/TAPE/WW+CW/CONNECTOR/STD	Connector	10/100
62017	LED/10PCS TAPE LIGHT 12V MOUNTING CLIPS	Mounting clips	1/100



INCLUDED IN THE BOX

- 1 tape light 16.4' (5 m)
- 1 plug-in driver
- 1 RGB remote control (for RGB kit only)



Lumen values are derived from photometric testing
For a complete list of compatible dimmers, please visit www.standardpro.com
Note: To avoid decreases in light levels, avoid connecting more than 16.4' (5 m) at a time





LED 120 V Tape

This LED tape works on direct line voltage 120 V, no need for an additional driver to be added to the system. Its robust construction, PVC jacket as well as IP65 certification makes it ideal for accent lighting in any retail, residential or commercial, indoor or outdoor applications. Offered in 10 or 30 meters reel, it can be cut in field for a complete custom solution.

- Can be cut every 1'
- 164' maximum run
- High lumen efficacy
- Each reel includes a hardwired end molded
- Plug-in or hardwire connectors sold separately





Order code	Description	Watts		Volts	Color temp.	Lumen output		Efficacy	CRI	Life L70	Power factor	Case qty (master)
		(W)	(per m)			(VAC)	(K)					
32.8' (10 m)												
67632 ¹	TAPE/32.8'/4W/27K/120V/IP65/72/16MM/STD	4	13.2	120	2 700	350	1 148	87	90+	50 000	>0.9	1
67635	TAPE/32.8'/4W/30K/120V/IP65/72/16MM/STD	4	13.2	120	3 000	350	1 148	87	90+	50 000	>0.9	1
67638	TAPE/32.8'/4W/40K/120V/IP65/72/16MM/STD	4	13.2	120	4 000	350	1 148	87	90+	50 000	>0.9	1
98.4' (30 m)												
67633 ¹	TAPE/98.4'/4W/27K/120V/IP65/72/16MM/STD	4	13.2	120	2 700	350	1 148	87	90+	50 000	>0.9	1
67636	TAPE/98.4'/4W/30K/120V/IP65/72/16MM/STD	4	13.2	120	3 000	350	1 148	87	90+	50 000	>0.9	1
67639	TAPE/98.4'/4W/40K/120V/IP65/72/16MM/STD	4	13.2	120	4 000	350	1 148	87	90+	50 000	>0.9	1
164' (50 m)¹												
67634	TAPE/164'/4W/27K/120V/IP65/72/16MM/STD	4	13.2	120	2 700	350	1 148	87	90+	50 000	>0.9	1
67637	TAPE/164'/4W/30K/120V/IP65/72/16MM/STD	4	13.2	120	3 000	350	1 148	87	90+	50 000	>0.9	1
67640	TAPE/164'/4W/40K/120V/IP65/72/16MM/STD	4	13.2	120	4 000	350	1 148	87	90+	50 000	>0.9	1

Lumen values are derived from photometric testing
 For complete warranty information, please visit www.standardpro.com
¹ Consult factory for availability



Dimensions & Cuts

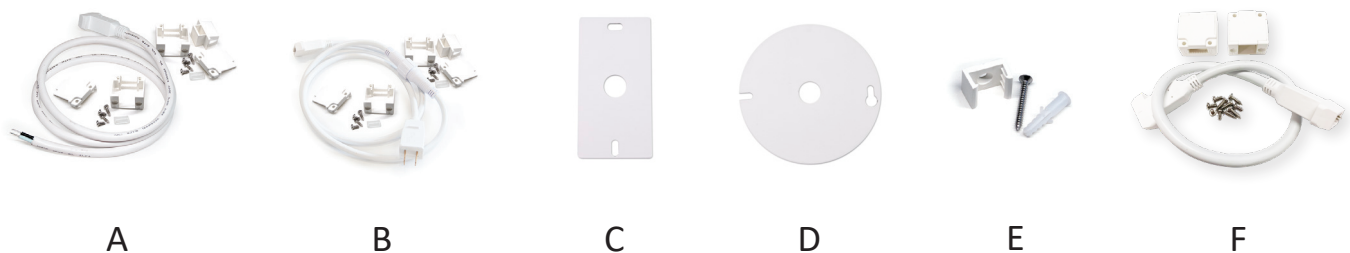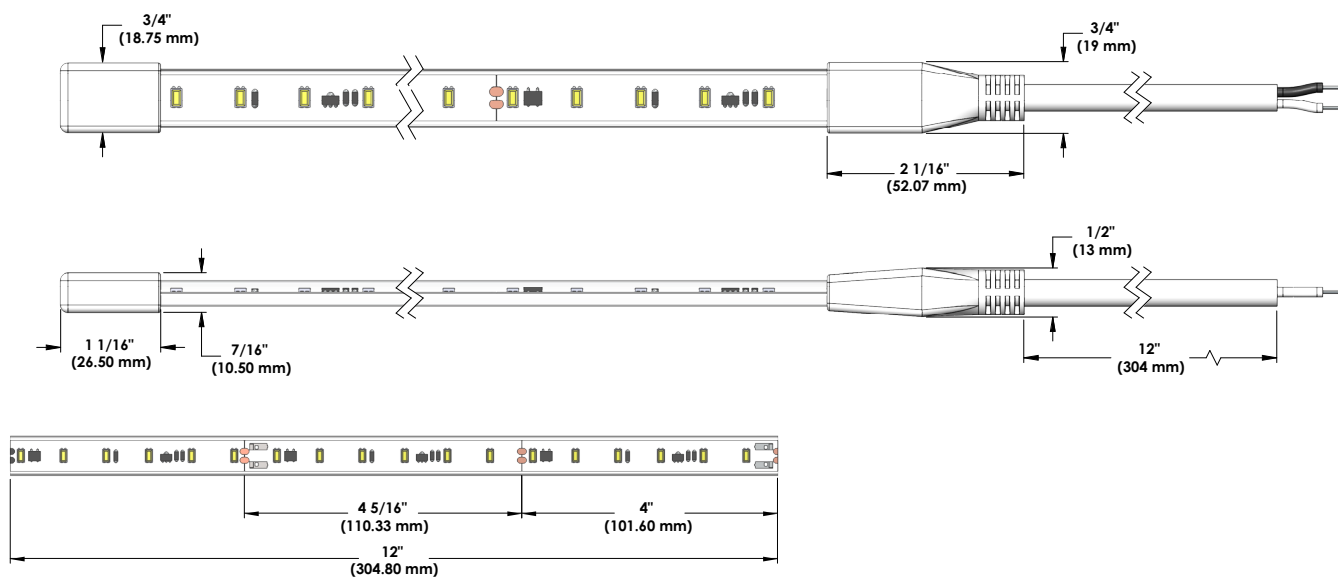

ACCESSORIES

Order code	Description	Type	Figure	Quantity per pack	Case qty (master)
Connectors					
67641	TAPE/HARDWIREKIT/120V/STD	Hardwire Kit	A	1	50
67642	TAPE/PLUG/120V/STD	120 V Power Cord	B	1	50
Accessories					
67643	TAPE/ELECTBOXCOVER/RECT/120V/STD	Electrical box cover plate - Rectangular	C	1	100
67644	TAPE/ELECTBOXCOVER/RND/120V/STD	Electrical box cover plate - Round	D	1	100
67645	TAPE/BRACKETS/120V/STD	Mounting bracket	E	10	100
67904	TAPE/6IN/JUMPER/120V/STD	6 in Jumper	F	1	100
67905	TAPE/12IN/JUMPER/120V/STD	12 in Jumper	F	1	100